

WAAS CH 86713 W26B	APP CRS 267°	Rwy Idg 10001 TDZE 790 Apt Elev 794
--	------------------------	--

RNAV (GPS) RWY 26L

GERALD R FORD INTL (G.R.R.)

▼



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALS, increase LNAV/VNAV Cat D visibility to RVR 5000.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH:

Climb to 2700 direct FERLI and track 267° to JAKES and hold.

ATIS 118.725	GREAT LAKES APP CON ★ 128.4 257.6	GRAND RAPIDS TOWER ★ 135.65 (CTAF) 339.8	GND CON 121.8	CLNC DEL 119.3	UNICOM 122.95
------------------------	---	--	-------------------------	--------------------------	-------------------------

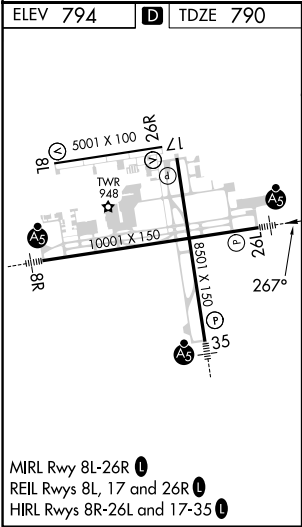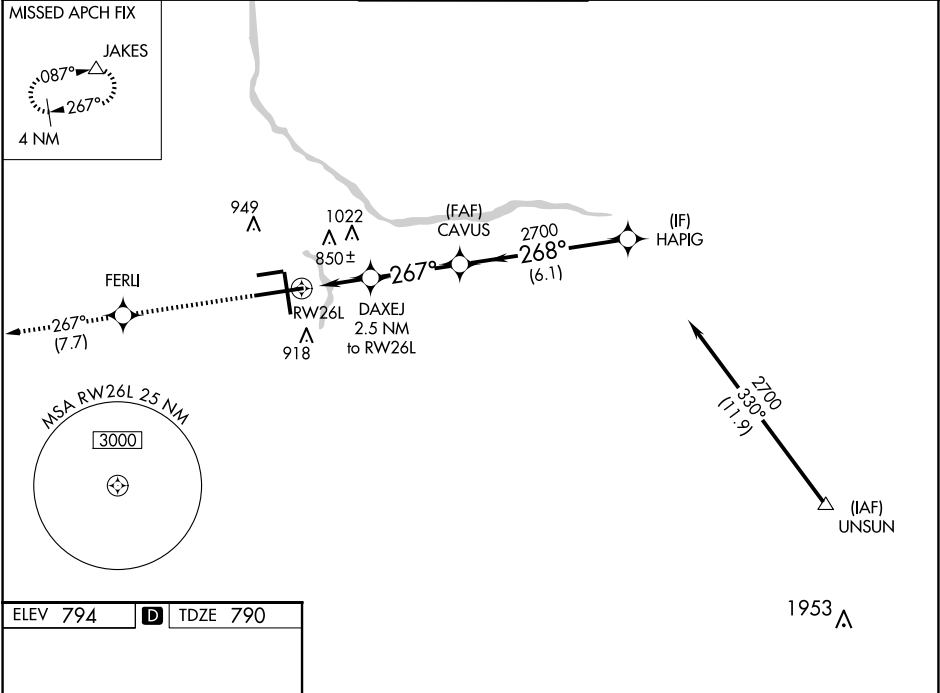

2700 ↑	FERLI ✦	tr 267°	JAKES △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).			
* LNAV only.				DAXEJ 2.5 NM to RW26L	CAVUS 2700	HAPIG	
CATEGORY	A		B		C		D
LPV DA **	990/24 200 (200-½)						
LNAV/ VNAV DA	1114/24 324 (400-½)						1114/40 324 (400-¾)
LNAV MDA	1280/24 490 (500-½)				1280/40 490 (500-¾)		1280/50 490 (500-1)
CIRCLING	1280-1 486 (500-1)				1340-1½ 546 (600-1½)		1360-2 566 (600-2)