

WAAS CH 93932 W01A	APP CRS 007°	Rwy ldg 8001 TDZE 1387 Apt Elev 1409
--	------------------------	---

RNAV (GPS) RWY 1


BEECH FACTORY (BEC)

Baro-VNAV NA when using Wichita Dwight D Eisenhower Ntl altimeter setting.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C and D and Circling Cat C and D visibility ½ mile.

MISSED APPROACH:
Climb to 3000 direct
DOLBE and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	CLNC DEL 125.0 (When tower closed)	UNICOM 122.95
---------------------------	---------------------------------------	--	-------------------------	---	-------------------------

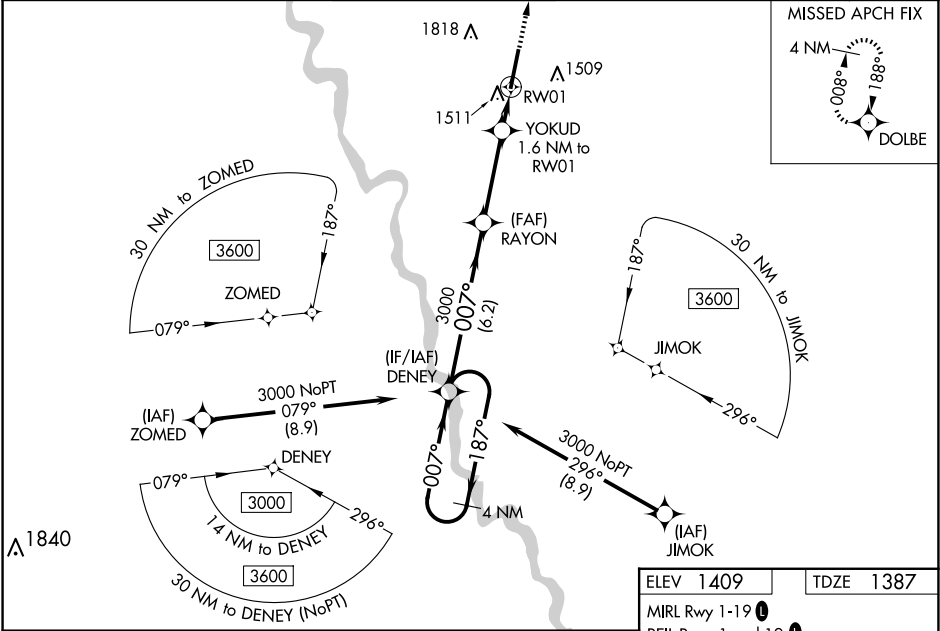

4 NM Holding Pattern				
DENEY RAYON YOKUD RW01 3000 007° 187° 007° 3000 3000 1920 GP 3.00° TCH 45 6.2 NM 3.4 NM 1.6 NM 3000 DOLBE * LNAV only				
CATEGORY	A	B	C	D
LPV DA	1637-¾ 250 (300-¾)			
LNAV/VNAV DA	1688-1 301 (300-1)			
LNAV MDA	1780-1	393 (400-1)	1780-1½	393 (400-1½)
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2¼ 711 (800-2¼)

