

WAAS CH 63239 W11A	APP CRS 110°	Rwy Idg 4979 TDZE 413 Apt Elev 413
--	------------------------	---


RNAV (GPS) RWY 11
POTOMAC AIRPARK (W35)

RNP APCH.

▼ Procedure NA at night. Rwy 11 helicopter visibility reduction below 1 SM NA. Obtain local
▲ NA altimeter setting on CTAF; when not received, use Martinsburg altimeter setting and increase all
MDAs 80 feet and increase LNAV and LP Cat B, C and D visibilities $\frac{1}{2}$ SM and increase Circling
Cat B visibility $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 3500 direct
BAATI and hold.



POTOMAC APP CON
126.825 239.025

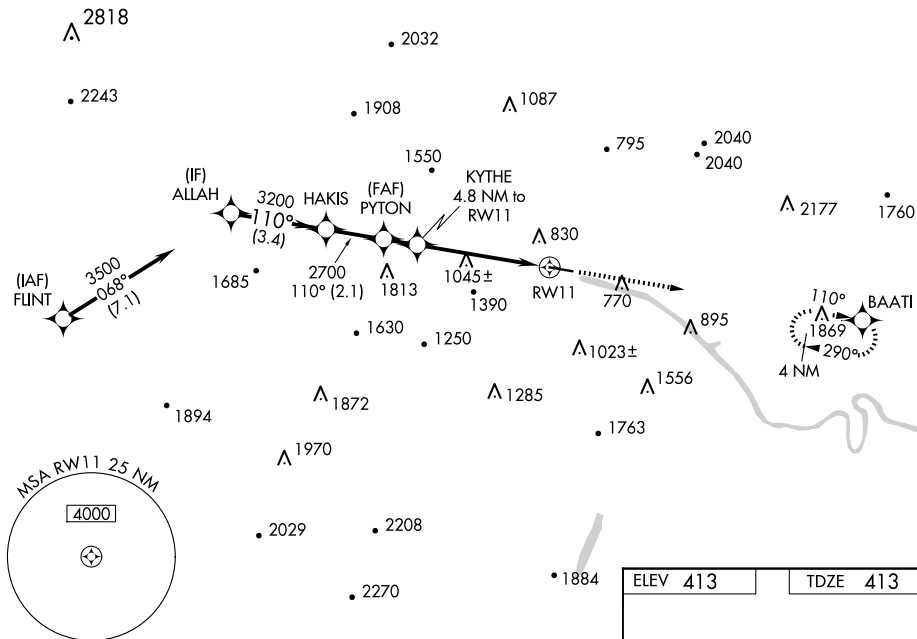CTAF
122.9

ELEV 413

TDZE 413

Visual Segment - Obstacles

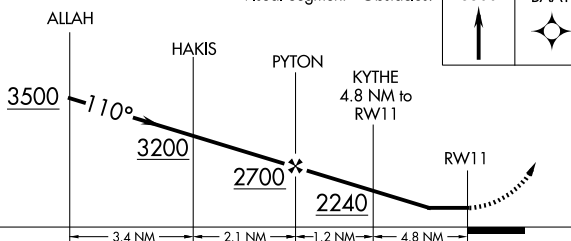

CATEGORY	A	B	C	D
LP MDA	1300-1¼	887 (900-1¼)	1300-2½	887 (900-2½)
LNAV MDA	1340-1¼	927 (1000-1¼)	1340-2½	927 (1000-2½)
CIRCLING	1340-1¼	927 (1000-1¼)	1700-3 1287 (1300-3)	1780-3 1367 (1400-3)

MIRL Rwy 11-29