

WAAS
Ch **49025**
W27A

APP CRS
273°

Rwy Idg
TDZE **481**
Apt Elev **483**

RNAV (GPS) RWY 27


WALKER COUNTY/BEVILL FLD (JFXX)

⚠


Baro-VNAV NA when using Birmingham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. VDP NA with Birmingham altimeter setting. When local altimeter setting not received, use Birmingham altimeter setting and increase all DA 104 feet and all MDA 120 feet. Increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cat C/D and Circling Cat C visibility ¾ mile and Circling Cat D visibility ½ mile.

MISSED APPROACH:
Climb to 2800 direct
CECAV and hold.

AWOS-3PT 119.225	BIRMINGHAM APP CON 127.675 338.2	GCO 121.725	UNICOM 123.075 (CTAF) 0
----------------------------	--	-----------------------	-----------------------------------

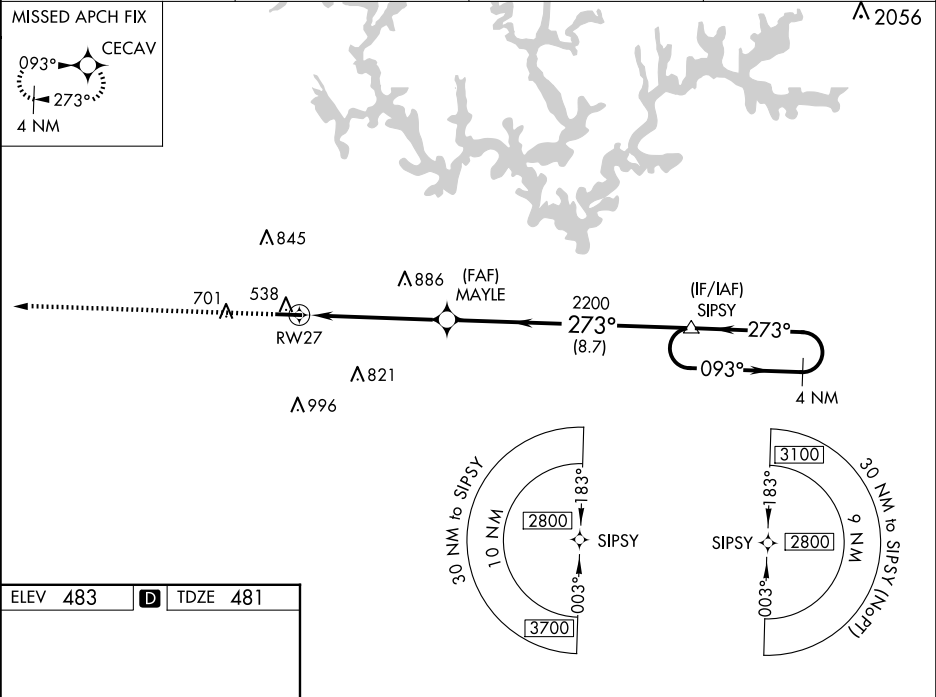

ELEV 483	D	TDZE 481
-----------------	----------	-----------------



	2800		CECAV	
	* LNAV only		* 1.6 NM to RW27	
	RW27		MAYLE	
	1.6 NM		3.6 NM	
	8.7 NM		SIPSY	
	4 NM Holding Pattern		093° → 2800	
	← 273°		GP 3.00° TCH 44	
CATEGORY	A	B	C	D
LPV DA	789-1		308 (300-1)	
LNAV/ DA VNAV	964-1 ½		483 (500-1½)	
LNAV MDA	1040-1		1040-1½	
	559 (600-1)		559 (600-1½)	
CIRCLING	1040-1		1080-1	
	557 (600-1)		677 (700-2)	
	1360-2¾		877 (900-2¾)	

SE-4, 17 APR 2025 to 15 MAY 2025

SE-4, 17 APR 2025 to 15 MAY 2025