

APP CRS	Rwy Idg	N/A
109°	TDZE	N/A
	Apt Elev	1510

RNAV (GPS)-D

SCOTTSDALE (SDL)


▼

When VGSI inoperative, circling Rwy 21 NA at night. When local altimeter setting not received, use Phoenix Sky Harbor Int altimeter setting and increase all MDA 100 feet and increase visibility Cat C ¼ SM. DME/DME RNP-0.3 NA.

⚠

MISSED APPROACH: Climbing right turn to 5000 direct WILUP and hold, continue climb-in-hold to 5000.

ATIS	PHOENIX APP CON	SCOTTSDALE TOWER*	GND CON	CLNC DEL
118.6	120.7 239.0	119.9 (CTAF) 0	121.6	124.8

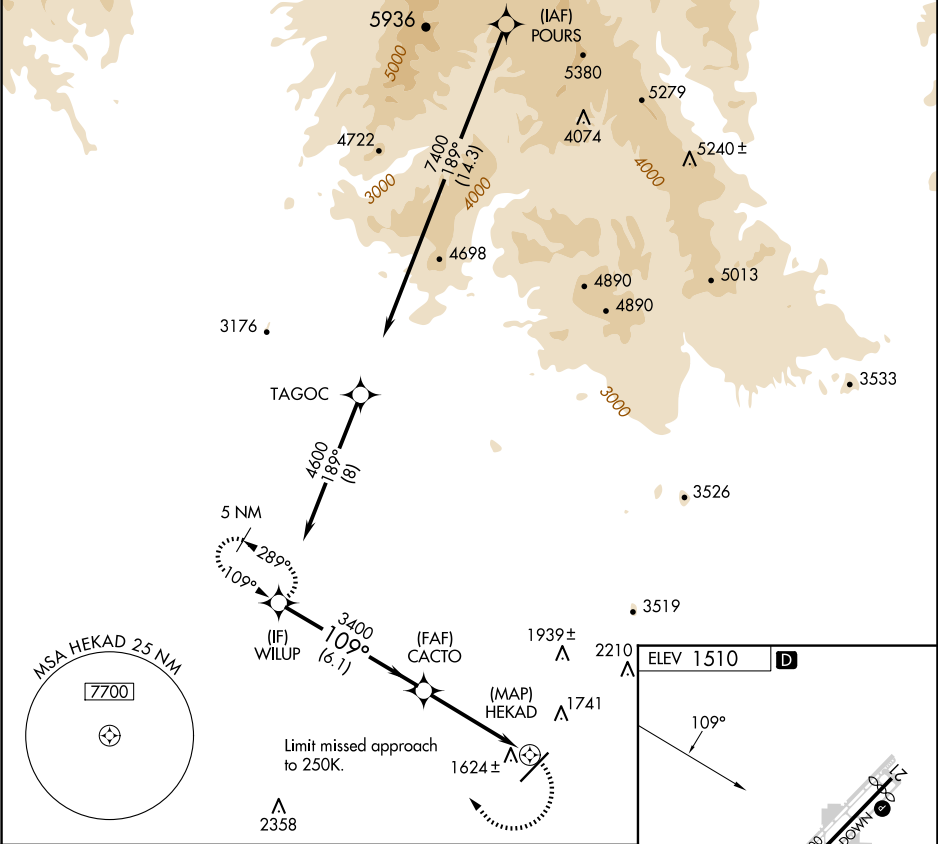

WILUP				
4600				
Procedure Turn NA				
CACTO				
3400				
HEKAD				
6.1 NM 4.4 NM				
CATEGORY	A	B	C	D
CIRCLING	2080-1 570 (600-1)	2100-1 590 (600-1)	2460-2¾ 950 (1000-2¾)	3300-3 1790 (1800-3)

