

BATTLE CREEK, MICHIGAN

AL-41 (FAA)

25051

WAAS CH 56411 W23A	APP CRS 227°	Rwy Idg 10004 TDZE 929 Apt Elev 952
--	------------------------	--

RNAV (GPS) RWY 23R
BATTLE CREEK EXEC AT KELLOGG FLD (BTL)

RNP APCH - GPS.


 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling to Rwy 5R, 23L and 31 NA at night. When local altimeter setting not received, use Grand Rapids altimeter setting: increase all LPV DA to 1236 feet and LNAV/VNAV DA to 1365 feet and visibility to RVR 5000 all Cats; increase all MDA 120 feet, LNAV Cats C and D visibility to 1¼ SM and Circling Cat C visibility to 2 SM and Cat D visibility to 2¼ SM. For inop ALS when using Grand Rapids altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cats C and D to visibility 1¼ SM. Baro-VNAV and VDP NA when using Grand Rapids altimeter setting. *RVR 1800 authorized with use of FD or AP or HUD to 1A.

MALSR



MISSED APPROACH:
Climb to 2500 direct
WEVSO and hold.

ATIS 128.325	GREAT LAKES APP CON★ 119.2 239.25	BATTLE CREEK TOWER★ 126.825 (CTAF)	GND CON 121.7	UNICOM 122.95
-----------------	--------------------------------------	---------------------------------------	------------------	------------------

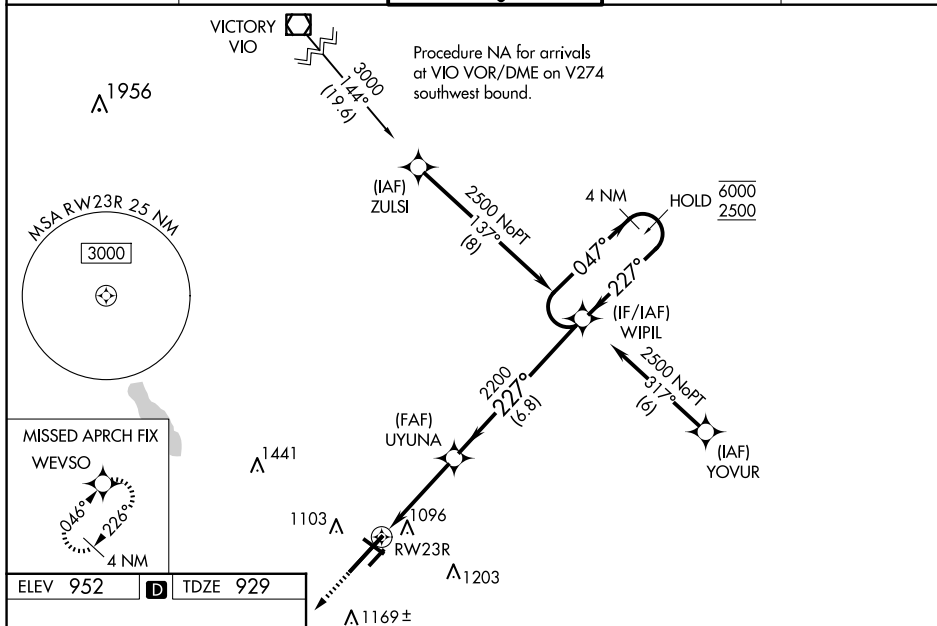

227°

2500

WEVS0

4 NM Holding Pattern

UYUNA 2200

WIPIL

047° → 6000

← 227° 2500

1.3 NM to RW23R

RW23R

2200

GP 3.00°

TCH 49

CATEGORY	A	B	C	D
LPV DA *	1129/24		200 (200-½)	
LNAV/ VNAV DA	1258/32		329 (400-⅝)	
LNAB MDA	1380/24	451 (500-½)	1380/45	451 (500-⅞)
C CIRCLING	1420-1 468 (500-1)	1480-1 528 (600-1)	1520-1½ 568 (600-½)	1520-2 568 (600-2)

HIRL Rwy 5L-23R **L**

MIRL Rwy 13-31 and 5R-23L **L**

REIL Rws 5L, 5R, 13, 23L and 31 **L**

BATTLE CREEK, MICHIGAN

Amdt 1E 21MAR24

BATTLE CREEK EXEC AT KELLOGG FLD (BTL)

42°18'N-85°15'W

RNAV (GPS) RWY 23R

EEC-1, 15 MAY 2025 to 12 JUN 2025

EC-1, 15 MAY 2025 to 12 JUN 2025