

WAAS CH 58109 W02A	APP CRS 021°	Rwy Idg TDZE 913 Apt Elev 913	7026 913
--	------------------------	---	---------------------------


RNAV (GPS) RWY 2
DE KALB TAYLOR MUNI (DKB)

▼ Baro-VNAV NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. VDP NA when using Aurora altimeter setting. When local altimeter setting not received, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cats C/D visibility, and Circling Cats C/D visibility ¼ mile. For inop MALSR, increase LPV all Cats visibility to 1.


MALSR

MISSED APPROACH:
Climb to 3000 direct
JUDVI and via 057°
track to YEARN and
hold.

AWOS-3 119.075	CHICAGO APP CON 133.5 349.0	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

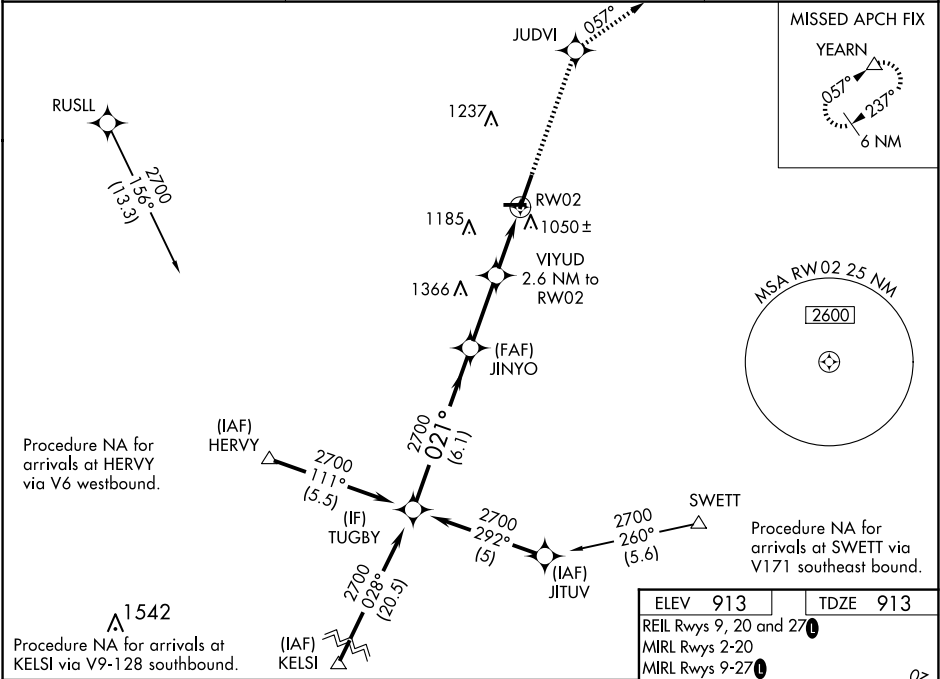

Procedure Turn NA				VGSIs and RNAV glidepath not coincident (VGSIs Angle 3.00/TCH 53).		3000	JUDVI	tr	057°	YEARN
TUGBY				JINYO						
GP 3.00° TCH 55				VGSIs and RNAV glidepath not coincident (VGSIs Angle 3.00/TCH 53).						
2700				2700						
6.1 NM				2.8 NM		1.4 NM	1.2 NM			
CATEGORY				A		B		C		D
LPV DA				1207-½		294 (300-½)				
LNAV/VNAV DA				1360-1		447 (500-1)				
LNAV MDA				1360-½ 447 (500-½)		1360-¾ 447 (500-¾)		1360-1 447 (500-1)		
CIRCLING				1360-1 447 (500-1)		1500-1 587 (600-1)		1600-2 687 (700-2)		1740-2¾ 827 (900-2¾)

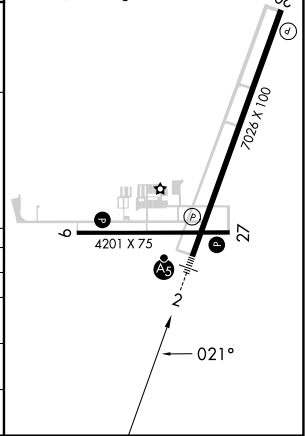

EC-3, 15 MAY 2025 to 12 JUN 2025

EC-3, 15 MAY 2025 to 12 JUN 2025