
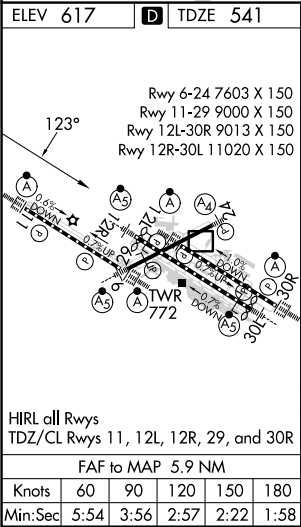


LOC/DME I-LDZ	APP CRS	Rwy Idg	8956
108.9	123°	TDZE	541
Chan 26		Apt Elev	617

ILS or LOC RWY 12L

ST LOUIS LAMBERT INTL (STL)

RADAR and DME required.			ALSf-2	MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct TOY VORTAC and hold.	
For inop ALS, increase S-ILS 12L Cat E visibility to RVR 4000 and S-LOC 12L Cat E visibility to 1½ SM. Simultaneous approach authorized with Rwy 11. Simultaneous approach authorized with Rwy 12R requires use of vertical guidance; maintain last altitude until established on the glideslope.					
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1 CPDLC

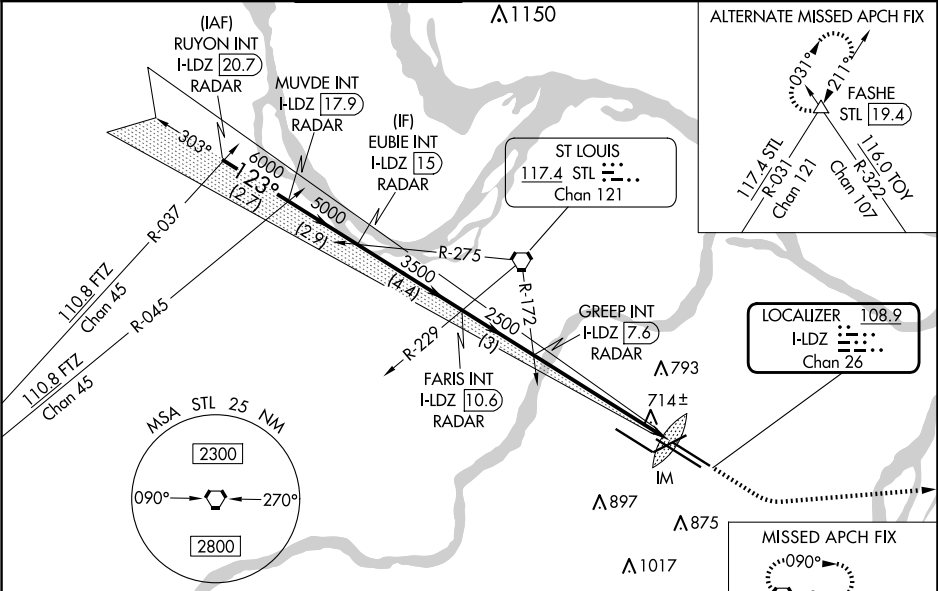

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 56).					
RUYON INT I-LDZ 20.7	MUVDE INT I-LDZ 17.9	EUBIE INT I-LDZ 15	FARIS INT I-LDZ 10.6	GREEP INT I-LDZ 7.6	IM
6000	6000	5000	3500	2500	2500
GS 3.00° TCH 54					
2.7 NM 2.9 NM 4.4 NM 3 NM 4.7 NM 1 NM 0.2					
CATEGORY	A	B	C	D	E
S-ILS 12L	741/18			200 (200-½)	741/24 200 (200-½)
S-LOC 12L	980/24 439 (400-½)			980/40 439 (400-¾)	980/50 439 (400-1)