

APP CRS
064°

Rwy ldg
TDZE
Apt Elev

7323
551
618

RNAV (GPS) RWY 6
ST LOUIS LAMBERT INTL (STL)


RNP APCH.

▼ WAAS VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV Cat E visibility to 1½ SM and LNAV Cats C/D/E visibility to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct VELVT and hold, continue climb-in-hold to 3000.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---	---	--------------------------------	-------

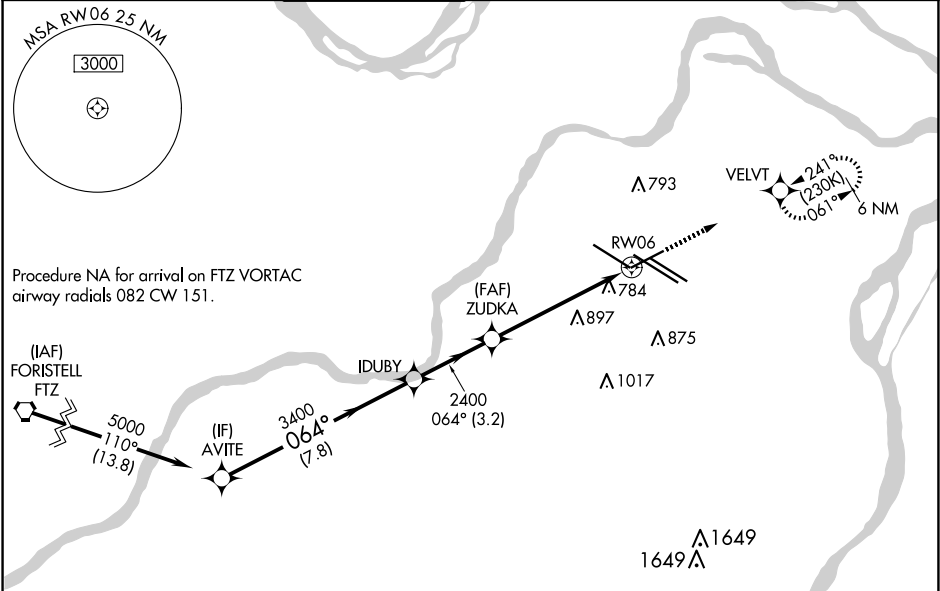

ELEV 618

D TDZE 551

GP 3.00°
TCH 50

AVITE IDUBY ZUDKA

5000 3400 2400

064°

*1.4 NM to RWY06

RWY06

*LNAV only

7.8 NM 3.2 NM 4.3 NM 1.4

CATEGORY	A	B	C	D	E
LNAV/VNAV	DA	1103/60	552 (500-1¼)		
LNAV MDA	1040/24	489 (500-½)	1040/50	489 (500-1)	

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150

HIRL all Rwy's
TDZ/CL Rwy's 11, 12L, 12R, 29, and 30R