


WAAS CH 99621 W30B	APP CRS 303°	Rwy ldg 10679 TDZE 583 Apt Elev 617
--	------------------------	--

RNAV (GPS) Y RWY 30L

ST LOUIS LAMBERT INTL (STL)

RNP APCH - GPS.	MALSRR	MISSED APPROACH: Climb to 3000 direct TUDNE and hold, continue climb-in-hold to 3000.
Simultaneous approach authorized with Rwy 29. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Rwy 30L helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 6000 and LNAV Cat A/B visibility to RVR 5500. *RVR 1800 authorized with use of FD or AP or HUD to DA.		

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 118.5 257.7	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
--	---	---------------------------------------	---	--------------------------------	-------

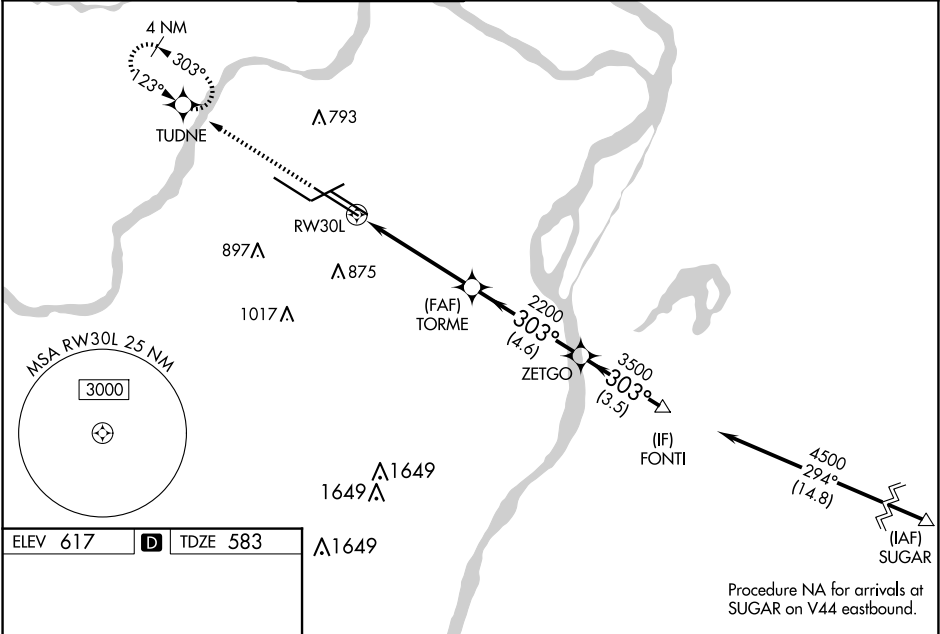

ELEV 617	D	TDZE 583
Rwy 6-24 7603 X 150 Rwy 11-29 9000 X 150 Rwy 12L-30R 9013 X 150 Rwy 12R-30L 11020 X 150		
HIRL all Rwys TDZ/CL Rwys 11, 12L, 12R, 29, and 30R		
3000 TUDNE		
1.5 NM to RW30L		
TORME 2200		
ZETGO 3500		
FONTI 4500		
GP 3.00° TCH 58		
CATEGORY	A	B
LPV DA*	783/24 200 (200-½)	
LNAV/VNAV DA	974/40 391 (400-¾)	
LNAV MDA	1120/40 537 (600-¾)	1120/55 537 (600-1)

NC-3, 15 MAY 2025 to 12 JUN 2025

NC-3, 15 MAY 2025 to 12 JUN 2025