

WAAS
CH **65900**
W04A

APP CRS
044°

Rwy Idg **5200**
TDZE **83**
Apt Elev **83**

RNAV (GPS) RWY 4


HANCOCK COUNTY/BAR HARBOR (BHB)

RNP APCH - GPS

Baro-VNAV NA when using Bangor altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. When local altimeter setting not received, use Bangor altimeter setting and increase LPV DA to 416 feet, increase LNAV/VNAV DA to 547 feet, and all visibilities ¾ SM. Increase all MDAs 100 feet and LNAV visibility Cats C/D, and Circling visibility Cats C/D ¼ SM. Circling Rwy 17, 35 NA at night. Rwy 4 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
BECRA and hold.

AWOS-3PT 118.35	BANGOR APP CON 133.6 284.65	CLNC DEL 119.9	UNICOM 123.0 (CTAF)	122.7
---------------------------	---------------------------------------	--------------------------	-------------------------------	--------------

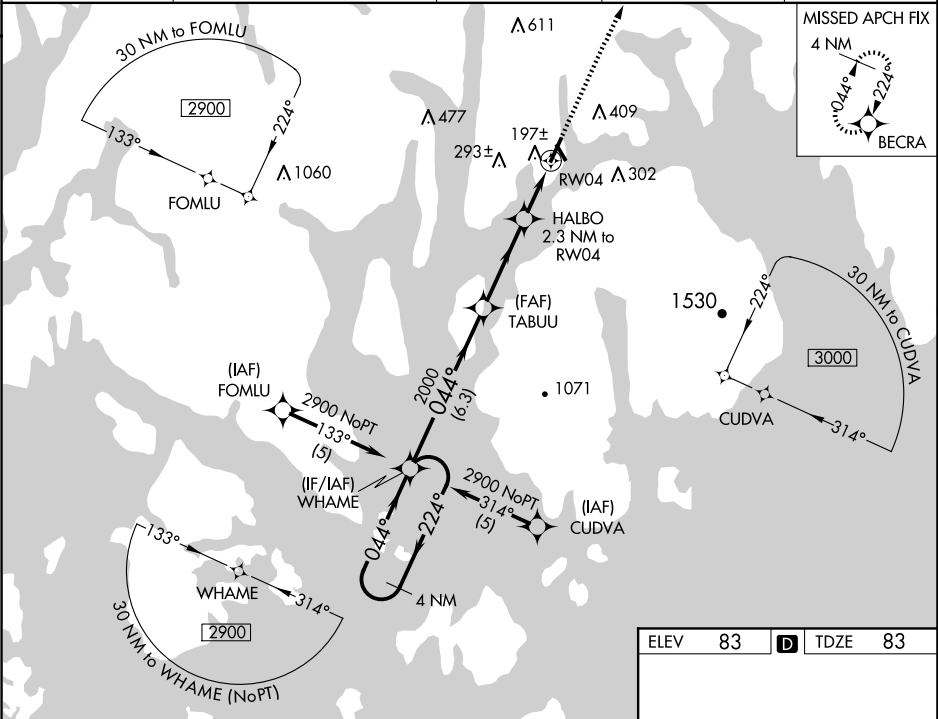

4 NM Holding Pattern

WHAME

TABUU

2900 ← 224°
044° →

2000

* HALBO 2.3 NM to RW04

* 860

GP 3.00°
TCH 55°

6.3 NM

3.5 NM

2.3

3000

BECRA

* LNAV only

CATEGORY	A	B	C	D
LPV DA		333-¾	250 (300-¾)	
LNAV/VNAV DA		464-1⅛	381 (400-1⅛)	
LNAV MDA	480-1	397 (400-1)	480-1⅛	397 (400-1⅛)
CIRCLING	600-1 517 (600-1)	720-1 637 (700-1)	720-1¾ 637 (700-1¾)	840-2½ 757 (800-2½)

REIL Rwy 4

HIRL Rwy 4-22