

WAAS CH 77906 W03A	APP CRS 030°	Rwy Idg 6780 TDZE 830 Apt Elev 859
--	------------------------	---

RNAV (GPS) RWY 3
MID-OHIO VALLEY RGNL (PKB)

RNP APCH.

⚠ Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 38°C.

⚠ When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1302 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1436 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats A/B visibility to RVR 5500. For inop ALS, when using Athens/Albany altimeter setting, increase LPV all Cats visibility to 1½ SM and LNAV/VNAV all Cats visibility to 1¾ SM.


MALSR
AS

MISSED APPROACH:
Climb to 3000 direct
OWAVE and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 257.8	GND CON 126.45	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

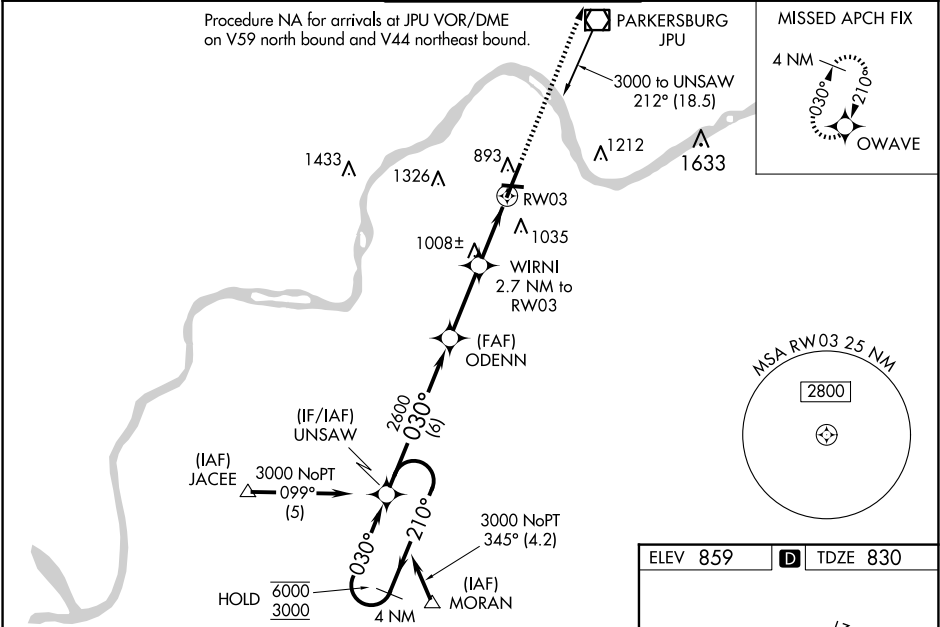

4 NM Holding Pattern		UNSAW	ODENN	WIRNI 2.7 NM to RW03	OWAVE
6000 ← 210°		→ 030°	2600	*1.3 NM to RW03	* LNAV only.
3000		→ 030°	*1700	RW03	
GP 3.00° TCH 48					
		6 NM	2.8 NM	1.4 NM	1.3 NM
CATEGORY	A	B	C	D	
LPV DA		1202/40	372 (400-¾)		
LNAV/VNAV DA		1336/60	505 (500-1½)		
LNAV MDA		1260/40	430 (500-¾)		
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)	

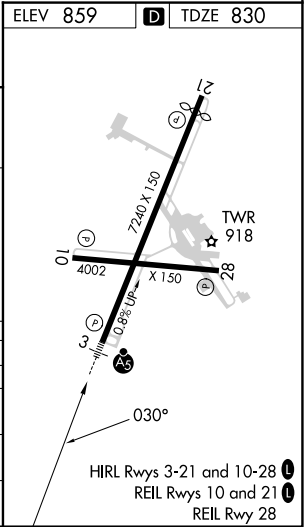

NE-4, 15 MAY 2025 to 12 JUN 2025

NE-4, 15 MAY 2025 to 12 JUN 2025