

WAAS CH 49229 W29A	APP CRS 291°	Rwy Idg TDZE Apt Elev	5091 1989 1989
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 29


L M CLAYTON (OLF)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Wokal FLD/Glasgow-Valley County altimeter setting: increase LPV DA to 2330 ft and visibility ¾ SM, LNAV/VNAV DA to 2380 ft and visibility ½ SM; increase all MDA 160 feet and LNAV and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA with Glasgow altimeter setting.

MISSED APPROACH:
Climb to 4500 direct
RULIE and hold.

ASOS 118.325	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

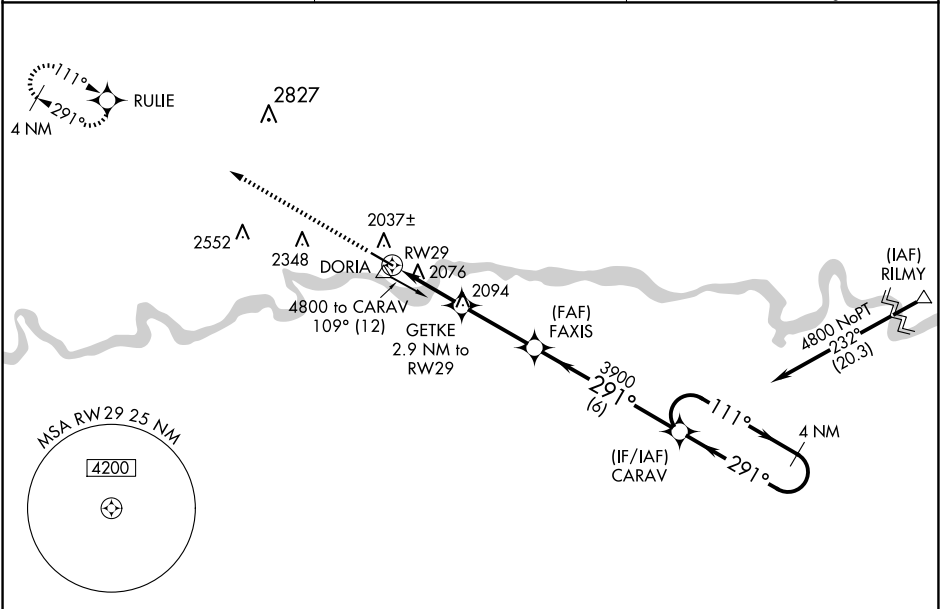

ELEV 1989	TDZE 1989
-----------	-----------

4500
↑
RULIE

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 29).

4 NM
Holding Pattern

CARAV

*LNNAV only.

GETKE 2.9 NM to RW29

*1 NM to RW29

RW29

1 NM

1.9 NM

3 NM

6 NM

3900

FAXIS

291°

111°

4800

GP 3.00°
TCH 40

2940*

3900

291° to RW29

5091 X 100

MIRL Rwy 11-29 0

REIL Rwy 11-29 0

CATEGORY	A	B	C	D
LPV DA	2189-¾ 200 (200-¾)			
LNAV/VNAV DA	2239-⅞ 250 (300-⅞)			
LNAV MDA	2340-1 351 (400-1)			
CIRCLING	2480-1	491 (500-1)	2660-2 671 (700-2)	2780-2½ 791 (800-2½)

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025