

LOC I-OLM	APP CRS	Rwy Idg	5500
111.9	176°	TDZE	207
		Apt Elev	208

ILS or LOC RWY 17

OLYMPIA RGNL (OLM)



⚠ DME or RADAR required. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1½ SM.

MALSR

A5

MISSED APPROACH: Climb to 1400 then climb to 5500 on OLM VORTAC R-176 to CETRA INT/OLM 15 DME and hold, continue climb-in-hold to 5500.

ATIS	SEATTLE APP CON	OLYMPIA TOWER*	GND CON	UNICOM
135.725	121.1 290.9	124.4(CTAF) 254.25	121.6	122.95

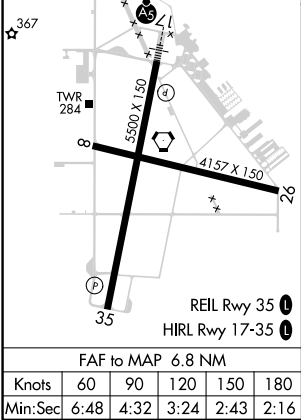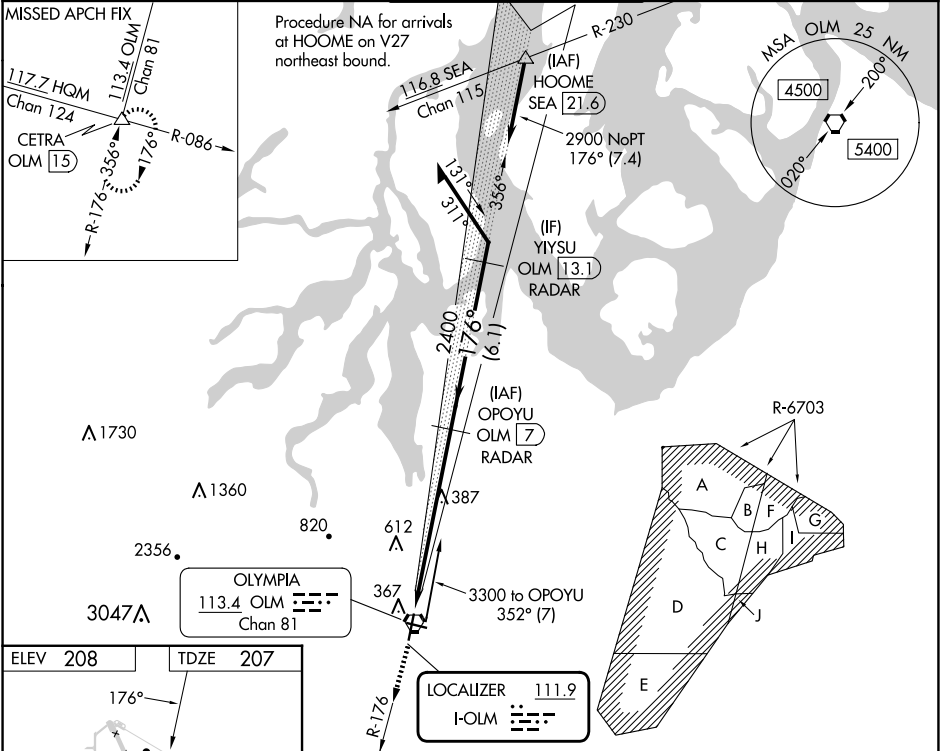

1400	5500	CETRA	OPOYU OLM 7 RADAR	Remain within 10 NM
OLM R-176				
OLM 0.3	3300	2400	2900	
		356°	176°	
		2400		GS 3.00° TCH 53
		6.8 NM		
CATEGORY	A	B	C	D
S-ILS 17	407-½ 200 (200-½)			
S-LOC 17	680-½ 473 (500-½)		680-1 473 (500-1)	
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)

NW-1, 15 MAY 2025 to 12 JUN 2025

NW-1, 15 MAY 2025 to 12 JUN 2025