

WAAS
CH **82712**
W11A

APP CRS
112°

Rwy Idg **4808**
TDZE **1487**
Apt Elev **1497**

RNAV (GPS) RWY 11

EASTERN OREGON RGNL AT PENDLETON (PDT)


RNP APCH.

▼
⚠

Baro-VNAV and VDP NA when using Walla Walla altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Walla Walla altimeter setting and increase all DA/MDA 120 feet; VNAV all Cats visibility 1⁄8 SM, LNAV Cat C visibility 3⁄8 SM, and Cat D visibility 1⁄8 SM, Circling Cat C visibility 1⁄4 SM and Circling Cat D visibility 1⁄2 SM.

MISSED APPROACH:
Climb to 5000 direct
ADXAB and on track
007° to ZUTED and hold.

ASOS 118.325	SPOKANE APP CON ★ 133.15 379.15	PENDLETON TOWER ★ 119.7 (CTAF) 257.8	GND CON 121.9 257.8	UNICOM 122.95
------------------------	---	--	-------------------------------	-------------------------

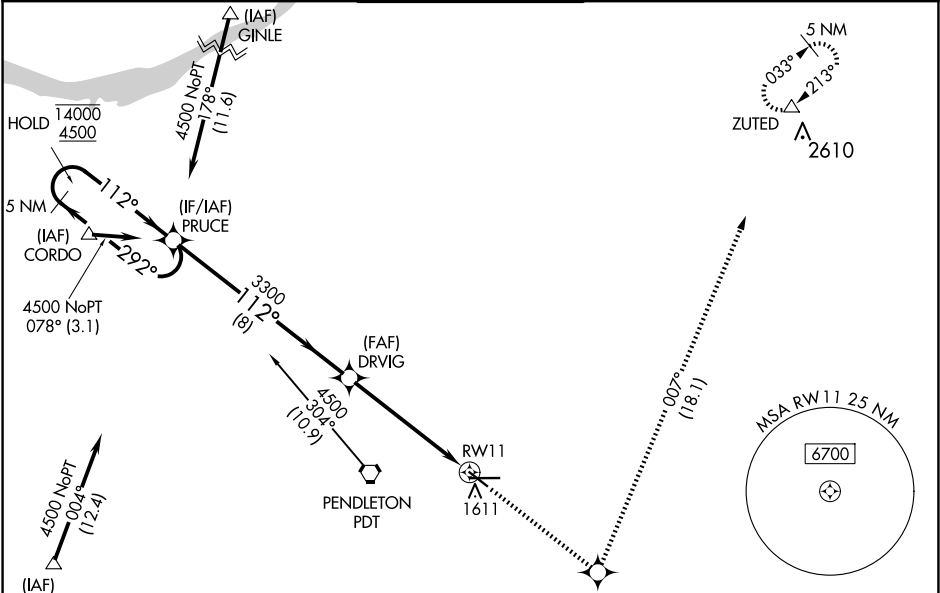

5 NM Holding Pattern

PRUCE

14000 ← 292°
4500 → 112°

GP 3.00°
TCH 43

8 NM

4.5 NM

1 NM

5000

ADXAB

ZUTED

* LNAV only

* 1 NM to RWY 11

RWY 11

112°

6301 X 150

4808 X 100

1601

1559

26

8

26

8

26

CATEGORY	A	B	C	D
LPV DA	1737-1 250 (300-1)			
LNAV/ VNAV DA	1850-1¼ 363 (400-1¼)			
LNAV MDA	1860-1 373 (400-1)		1860-1¼ 373 (400-1¼)	
CIRCLING	1920-1 423 (500-1)	1960-1 463 (500-1)	1980-1½ 483 (500-1½)	2200-2¼ 703 (800-2¼)

ELEV 1497

D

TDZE 1487

REIL Rwy 11 and 29
MRL Rwy 11-29
HIRL Rwy 8-26