

LOC/DME I-PSC 108.7 Chan 24	APP CRS 211°	Rwy Idg 7110 TDZE 403 Apt Elev 410
---	------------------------	---

ILS or LOC RWY 21R
TRI-CITIES (PSC)

DME required for LOC only.

DME required for procedure entry at GUSSE, EXODE, CITYS, PSC VOR/DME.

V VDP NA when using Hermiston altimeter setting. For inop ALS when using Hermiston altimeter setting, increase S-ILS 21R all Cats visibility to RVR 4500, increase S-LOC 21R Cats C and D visibility to 1 3/4 SM. When local altimeter setting not received, use Hermiston altimeter setting: increase DA to 698 feet and all MDAs 100 feet; increase S-LOC 21R Cat C and D visibility 3/8 SM and Circling Cat C and D visibility 1/2 SM. * RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hermiston altimeter setting).


MALSR



MISSED APPROACH:

Climb to 1200 then climbing left turn to 3200 on heading 050° and PSC VOR/DME R-092 to CITYS INT/PSC VOR/DME 14 DME and hold.

ATIS 125.65	SPOKANE APP CON ★ 128.75 377.2	TRI-CITIES TOWER ★ 135.3 (CTAF) 0 323.3	GND CON 121.8	CLNC DEL 120.0	UNICOM 122.95
----------------	-----------------------------------	--	------------------	-------------------	------------------

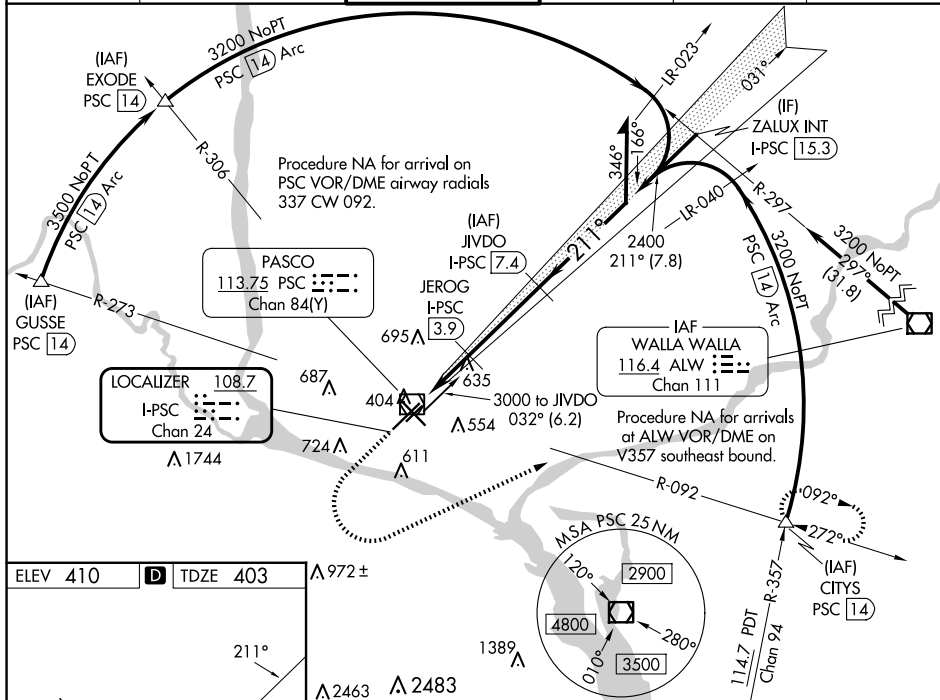

REIL Rwy 3L and 12
MIRL Rwy 12-30
HIRL Rwy 3L-21R

CATEGORY	A	B	C	D
S-ILS 21R*	603/24 200 (200-½)			
S-LOC 21R	940/24 537 (600-½)		940/55 537 (600-1)	
C CIRCLING	940-1 530 (600-1)		1040-1¾ 630 (700-1¾)	1100-2¼ 690 (700-2¼)

ILS or LOC RWY 21R

NW-1, 15 MAY 2025 to 12 JUN 2025