


RNAV (RNP) Y RWY 8R
EL PASO INTL (ELP)

RF required.



MISSED APPROACH: Climb to 4400 then climbing right turn to 7500 direct FABAN and hold.

T For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

D-ATIS	EL PASO APP CON	EL PASO TOWER	GND CON	CLNC DEL
120.0 254.3	124.25 298.85	118.3 239.275	121.9 348.6	125.0 379.1

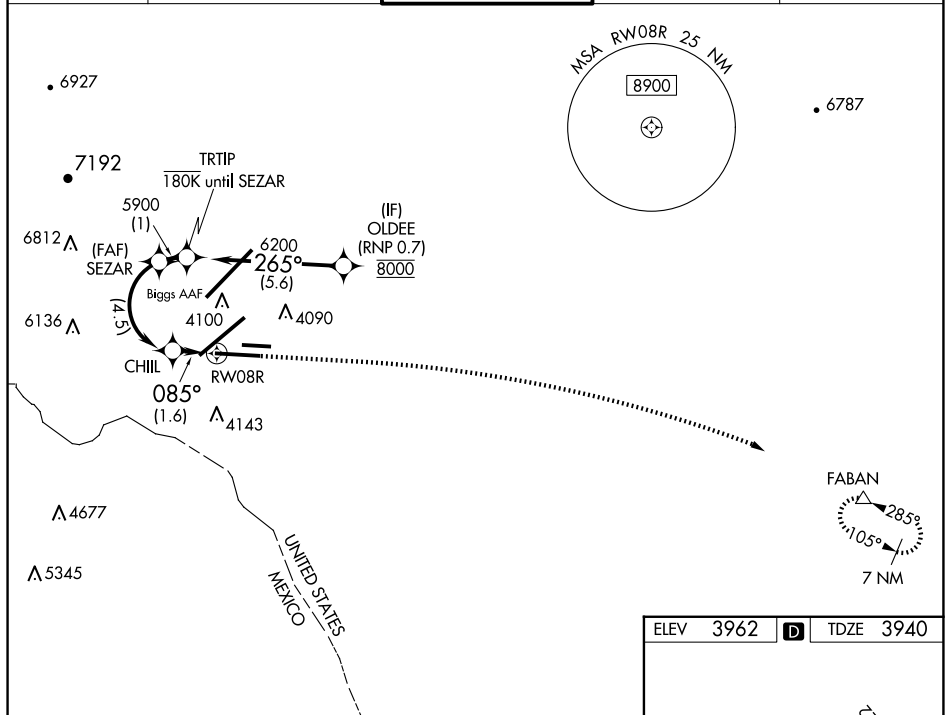


VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 75).

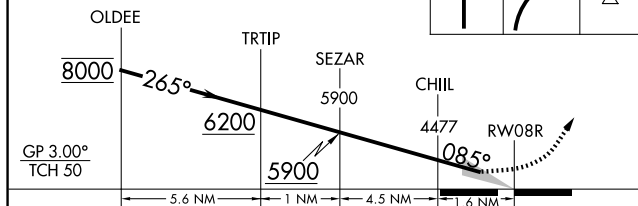

CATEGORY	A	B	C	D
RNP 0.20 DA		4193- $\frac{3}{4}$	253 (300- $\frac{3}{4}$)	
RNP 0.30 DA		4234- $\frac{7}{8}$	294 (300- $\frac{7}{8}$)	

AUTHORIZATION REQUIRED

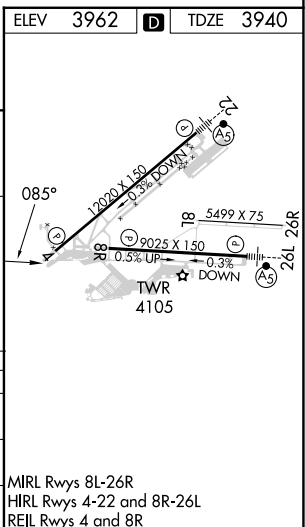

SC-3, 15 MAY 2025 to 12 JUN 2025