

WAAS
CH **63122**
W35A

APP CRS
346°

Rwy Idg
TDZE
Apt Elev

6932
311
321

RNAV (GPS) RWY 35

EASTERWOOD FLD (CLL)

RNP APCH.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1½ SM.

MALSR
⚠

MISSED APPROACH: Climb to 2100 direct ZAKBU and hold.

ATIS
126.85

HOUSTON APP CON
134.3 360.85


EASTERWOOD TOWER ★
118.5 (CTAF) 0 284.7

GND CON
128.7 284.7

CLNC DEL
128.7

CLNC DEL
120.4
(when twr closed)

UNICOM
122.95

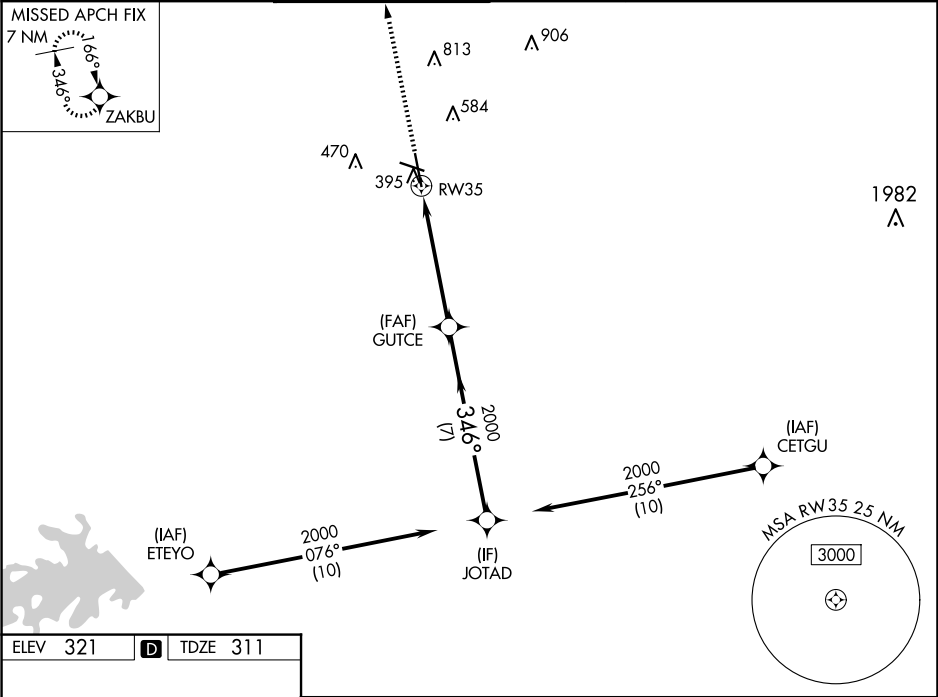

ELEV 321 D TDZE 311

REIL Rwy 29
MIRL Rwy 11-29
HIRL Rwy 17-35

2100 ZAKBU

*LNAV only.

1.3 NM to RW35

1.3 NM 3.9 NM 7 NM

CATEGORY	A	B	C	D	E
LPV DA	511-½		200 (200-½)		
LNAV/VNAV DA	563-½		252 (300-½)		
LNAV MDA	760-½	449 (500-½)	760-⅞		449 (500-⅞)
CIRCLING	860-1 539 (600-1)	880-1 559 (600-1)	1000-2 679 (700-2)	1180-2¾ 859 (900-2¾)	1180-3 859 (900-3)