


ILS or LOC RWY 28


LOC/DME I-SVN 109.5 Chan 32	APCH CRS 276°	Rwy Idg 11,393 TDZE 41 Arprt Elev 41	[USA]	HUNTER AAF (KSVN)
DME required ▽ * When ALS inop, increase RVR to 40, vis to $\frac{3}{4}$ mile. ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to $\frac{1}{4}$ miles. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to $\frac{1}{2}$ miles.			ALSF-1  MISSED APPROACH: Climb to 1000, then climbing left turn to 2300 heading 050° and on SVN VOR/DME R-095 to ESPEY/ SVN 7.7 DME and hold.	

ATIS ★ 127.525 323.125	SAVANNAH APP CON ★ 120.4 353.775	TOWER ★ 124.975 (CTAF) 0 279.575	GND CON ★ 121.8 291.675
--------------------------------------	--	--	---------------------------------------

**** Circling not authorized for CAT CD N of Rwy 10-28.

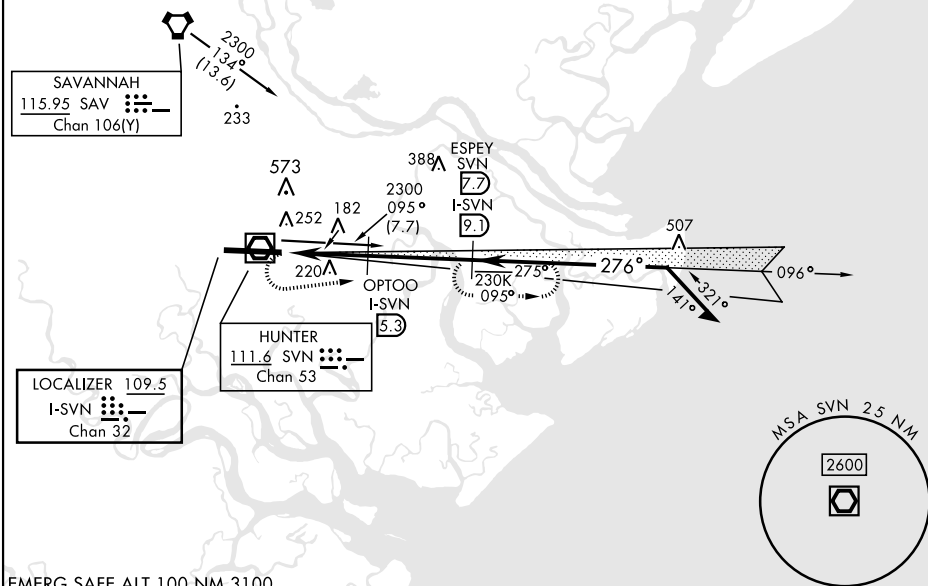

EMERG SAFE ALT 100 NM 3100

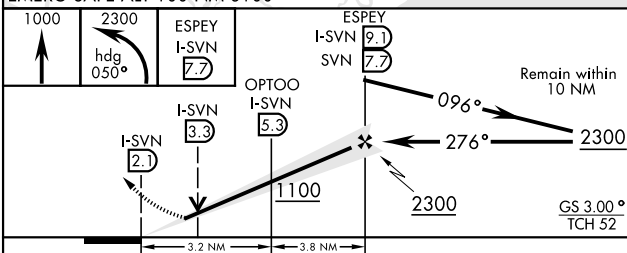

CATEGORY	A	B	C	D
S-ILS 28*	241/24	200	(200-½)	
S-LOC 28**	480/24	439 (500-½)	480/40	439 (500-¾)
**** C CIRCLING	600-1	559 (600-1)	600-1½ 559 (600-1½)	620-2 579 (600-2)
LOCAL ALTIMETER, WITHOUT LAST STEPDOWN FIX				
S-LOC 28***	600/24	559 (600-½)	600/60	559 (600-1½)
**** C CIRCLING	600-1	559 (600-1)	600-1½ 559 (600-1½)	620-2 579 (600-2)

ELEV 41
TDZE 41

REIL Rwy 10 10

HIRL Rwy 10-28 L

FAF to MAP 7 NM					
Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20