

WAAS CH 48906 W04A	APP CRS 041°	Rwy Idg 6498 TDZE 160 Apt Elev 170
--	------------------------	---

RNAV (GPS) RWY 4
TUSCALOOSA NTL (TCL)

T Circling Rwy 12, 30 NA at night. For uncompensated Baro-VNAV
A systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS,
increase LNAV/VNAV all Cats visibility to 1½ SM.



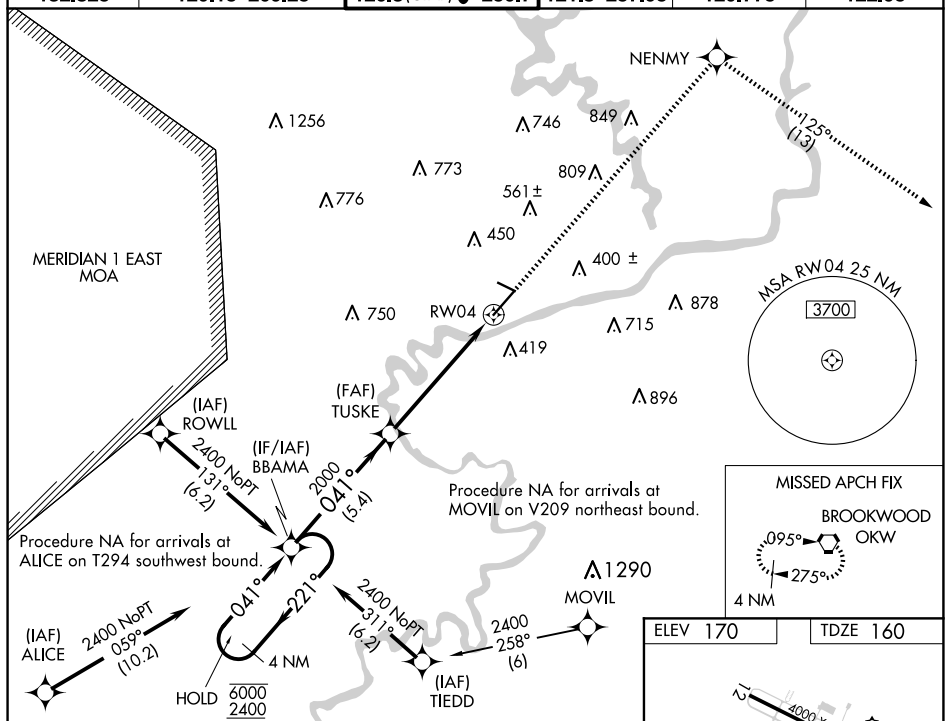
MISSED APPROACH: Climb to 2500 direct NENMY and on track 125° to OKW VORTAC and hold.

ASOS
132.825

BIRMINGHAM APP CON
120.15 269.25

TUSCALOOSA TOWER ★
126.3 (CTAF) L 256.7

GND CON	
121.8	257.95

CLNC DEL
120.775UNICOM
122.954 NM
Holding Pattern BBAMA

$\frac{6000}{2400}$ ← 221°
 041° →

GP 3.00°
 TCH 53

2500

NENMY

OKW

ISKE

1.2 NM to
RW04

← 5.4 N

98 N

— 4.4 NM —

→	1.2	←

CATEGORY	A	B	C	D
LPV DA	360-1/2		200 (200-1/2)	
LNAV/ VNAV DA	575-3/4		415 (500-3/4)	
LNAV MDA	600-1/2	440 (500-1/2)	600-3/4	440 (500-3/4)
 CIRCLING	720-1 550 (600-1)	800-1 630 (700-1)	960-2 1/4 790 (800-2 1/4)	960-2 1/2 790 (800-2 1/2)

TUSCALOOSA NTL (TCL)
RNAV (GPS) RWY 4