TOP ALTITUDE: FL230

TAKEOFF MINIMUMS
Rwys 7, 26: NA-ATC.
Rwys 8, 16L: Standard with minimum climb of 400' per NM to 5934.
Rwy 16R: Standard with minimum climb of 450' per NM to 5934.
Rwys 17L/R: Standard with minimum climb of 465' per NM to 5934.
Rwy 25: Standard
Rwys 34L/R: Standard with minimum climb of 500' per NM to 5934,
Rwys 35L/R: Standard with minimum climb of 320' per NM to 5934.

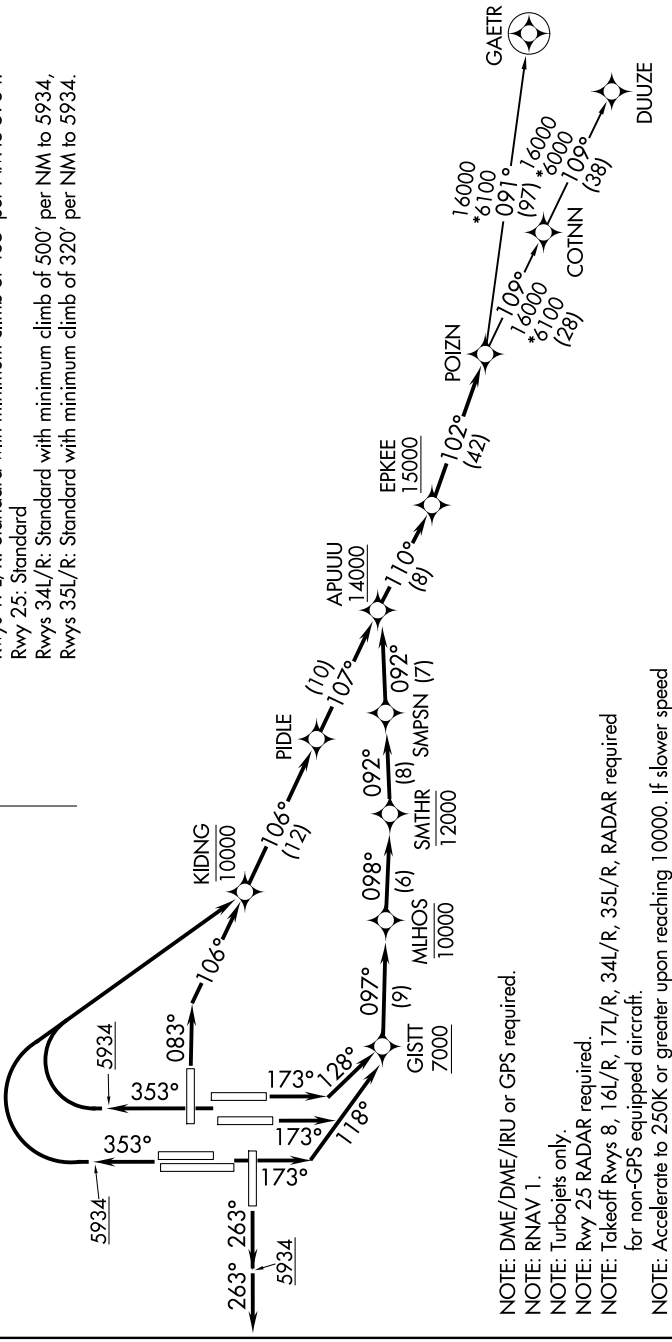

NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.
NOTE: Turbojets only.
NOTE: Rwy 25 RADAR required.
NOTE: Takeoff Rwys 8, 16L/R, 17L/R, 34L/R, 35L/R, RADAR required for non-GPS equipped aircraft.
NOTE: Accelerate to 250K or greater upon reaching 10000. If slower speed is required to meet crossing restrictions advise CLNC DEL prior to taxi.
NOTE: Chart not to scale.

(NARRATIVE ON FOLLOWING PAGE)