

WAAS CH 99440 W19B	APP CRS 193°	Rwy Idg 4000 TDZE 124 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 19L
BETHEL (BET) (PABE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct ROLLR and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	--	-------------------------

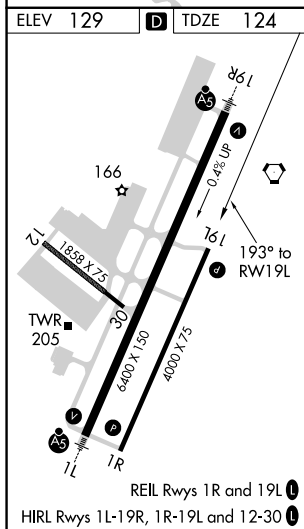
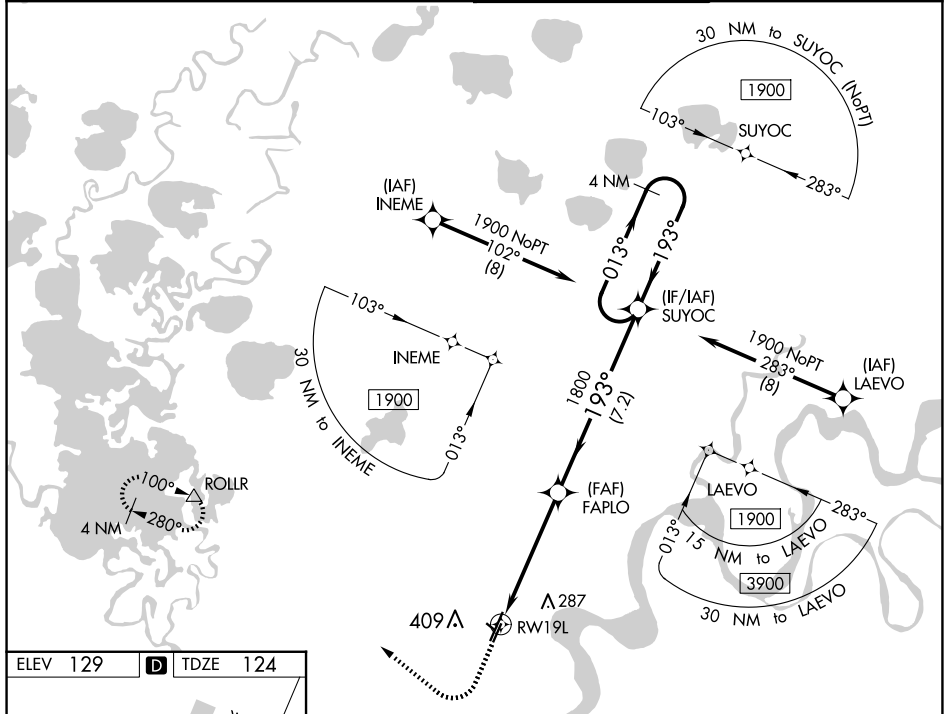


Diagram illustrating the 4 NM Holding Pattern for RW19L. The pattern is a teardrop shape with a 1.1 NM radius. The inbound leg is 7.2 NM long, and the outbound leg is 4 NM long. The holding pattern is centered on the 1800 frequency. The diagram shows the holding pattern for RW19L, with a 1.1 NM radius and a 4 NM holding pattern. The holding pattern is centered on the 1800 frequency. The diagram also shows the holding pattern for RW19L, with a 1.1 NM radius and a 4 NM holding pattern. The holding pattern is centered on the 1800 frequency.