

WAAS CH 70507 W19A	APP CRS 193°	Rwy Idg 6400 TDZE 120 Apt Elev 129
--	------------------------	---



RNAV (GPS) RWY 19R
BETHEL (BET)(PABE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLLR and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	---	-------------------------

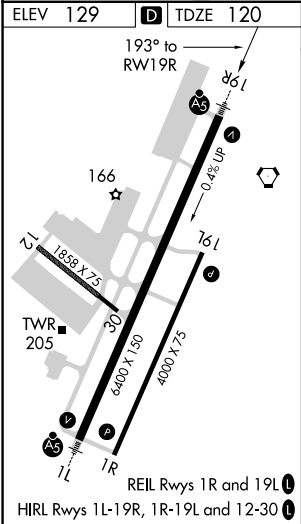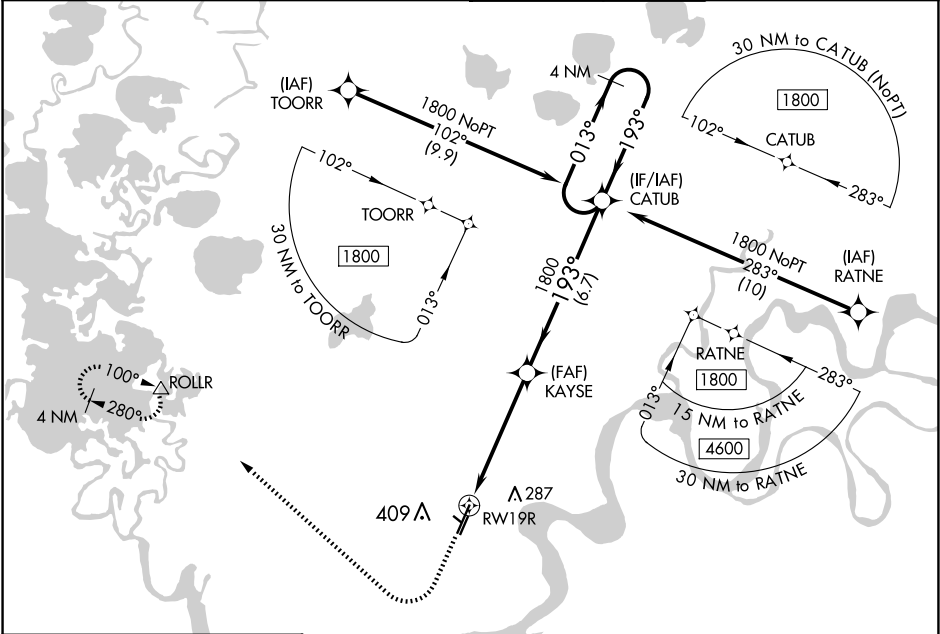

ELEV 129	TDZE 120	1700	2000	ROLLR
* LNAV only * 1.3 NM to RWY 19R RWY 19R 1.3 NM 3.9 NM 6.7 NM KAYSE 1800 CATUB 4 NM Holding Pattern 193° 013° 1800 GP 3.00° TCH 52				
CATEGORY	A	B	C	D
LPV DA	320/24 200 (200-½)			
LNAV/VNAV DA	479/40 359 (400-¾)			
LNAV MDA	560/24 440 (500-½)		560/45 440 (500-¾)	
CIRCLING	560-1 431 (500-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)

AK, 12 JUN 2025 to 07 AUG 2025

AK, 12 JUN 2025 to 07 AUG 2025