

LOC I-IWD
111.5

APP CRS
270°

Rwy Ldg
TDZE
Apt Elev
6501
1230
1230

ILS or LOC RWY 27

GOGEBIC/IRON COUNTY (IWD)

▼

▲ NA

☄ -26°C

When local altimeter setting not received, use ASX altimeter setting: increase DA to 1562 feet; increase all MDAs 140 feet and S-LOC 27 visibility Cats C and D ½ SM and Circling visibility Cat B ¼ SM. For inop ALS when using ASX altimeter setting, increase S-ILS 27 all Cats visibility to 1 SM.


MALSR

☂

☂

MISSED APPROACH:
Climb to 3300 then
right turn direct IWD
VOR/DME and hold.

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF) 1
----------------------------	-------------------------------------	---------------------------------

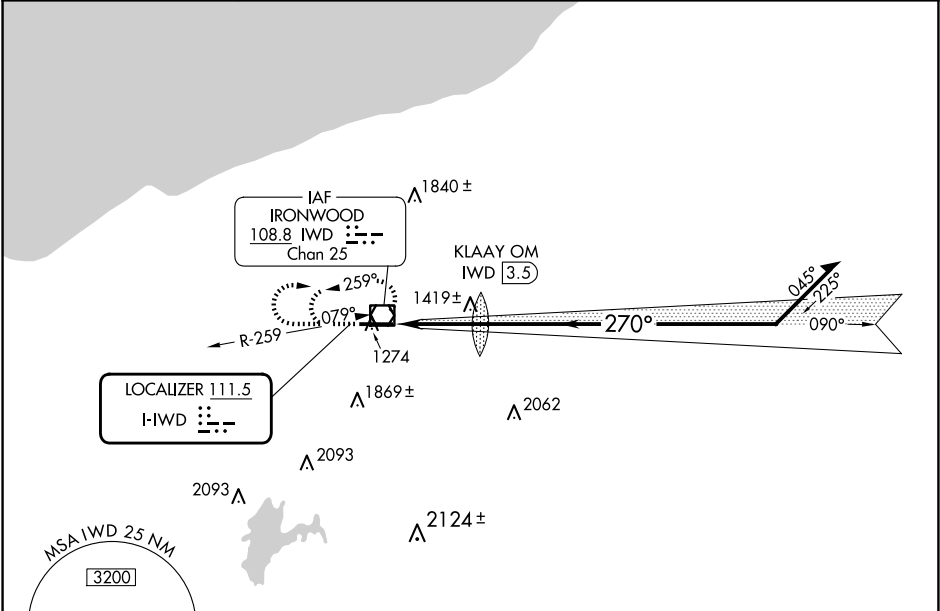

ELEV 1230 D TDZE 1230

3300

↻

IWD

IWD VOR/DME

090°

KLAA Y OM IWD 3.5

2311

270°

3300

2800

2500*

*LOC only

GS 3.00°

TCH 55

3.2 NM

Remain within 15 NM of IWD VOR/DME

CATEGORY	A	B	C	D
S-ILS 27		1430-½	200 (200-½)	
S-LOC 27	1720-½	490 (500-½)	1720-1	490 (500-1)
CIRCLING	2100-1¼	870 (900-1¼)	2200-3 970 (1000-3)	2220-3 990 (1000-3)

REIL Rwy 9 1

HIRL Rwy 9-27 1

FAF to MAP 3.2 NM

Knots	60	90	120	150	180
Min:Sec	3:12	2:08	1:36	1:17	1:04

6502 X 100

1307

270°