


WAAS CH 90148 W21A	APP CRS 205°	Rwy Ldg TDZE 475 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 21
CINCINNATI MUNI/LUNKEN FLD (LUK)

RNP APCH - GPS. Circling NA for Cat D north of Rwy 7-25. Circling Rwy 7 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 21 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats and LNAV Cat A and B visibility. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C and D visibility to 1½ SM.				MALSRL 	MISSED APPROACH: Climb to 2500 direct WONAN and on track. 130° to CALIF and hold.	
ATIS 123.6	CINCINNATI APP CON 121.0 254.25	LUNKEN TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 124.9 (When twr closed)	UNICOM 122.95

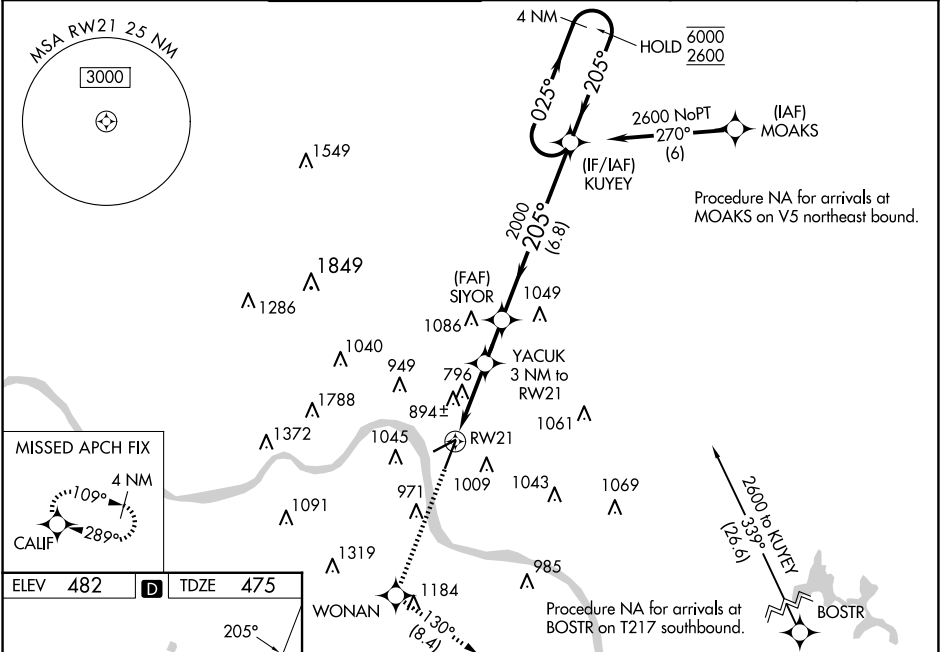

ELEV 482	D	TDZE 475
TWR 553 5127 X 100 6101 X 150 3		
2500 WONAN tr 130° CALIF YACUK 3 NM to RW21 SIYOR 2000 2 NM to RW21 RW21 1460 2000 6000 2600 025° 205° GP 3.00° TCH 39°		
4 NM Holding Pattern KUYEY		
CATEGORY	A	B C D
LPV DA	797/50	322 (400-1)
LNAV/VNAV DA	1160-1½	685 (700-1½)
LNAV MDA	1160/50 685 (700-1)	1160-1½ 685 (700-1½)
CIRCLING	1260-1 778 (800-1)	1360-1¼ 878 (900-1¼) 1360-2½ 878 (900-2½) 1420-3 938 (1000-3)