

WAAS CH 82038 W18A	APP CRS 180°	Rwy Idg 5298 TDZE 680 Apt Elev 682
--	------------------------	---

RNAV (GPS) RWY 18

DECATUR (DEC)

RNP APCH - GPS.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.


▲

Rwy 18 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:

Climb to 2300 direct OKEVE and hold.

ATIS 126.35	CHAMPAIGN APP CON ★ 132.85 290.225	DECATUR TOWER ★ 118.9(CTAF) 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	--	---	----------------------------------	-------------------------

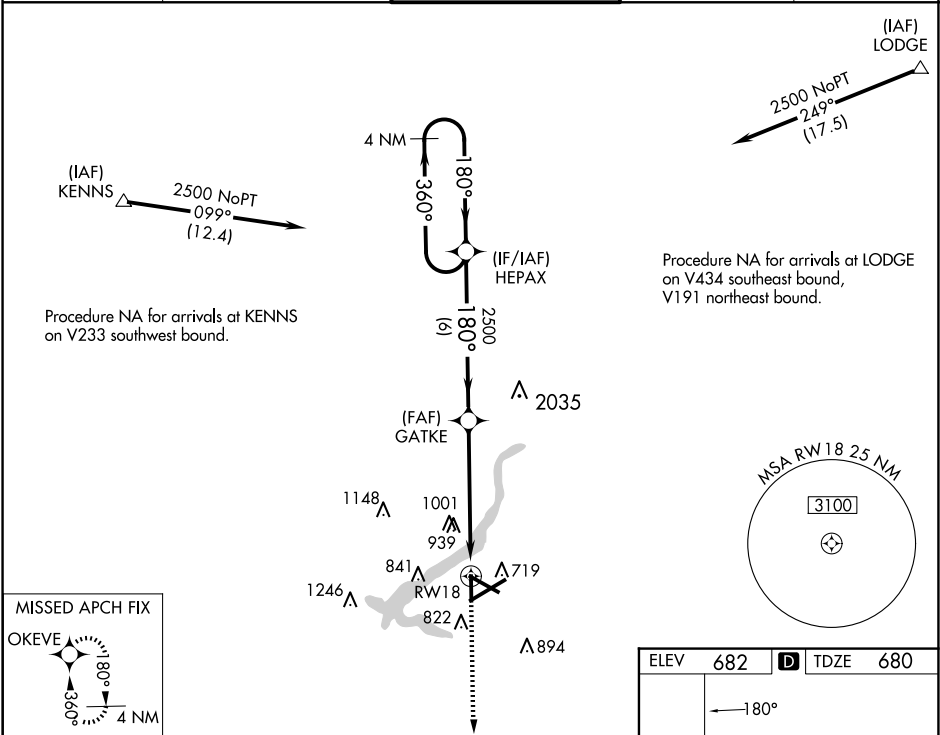

4 NM Holding Pattern

HEPAX

GATKE

2500

2500

2500

360°

180°

180°

360°

GP 3.00°

TCH 54

6 NM

4 NM

1.6 NM

2300

OKEVE

CATEGORY	A	B	C	D
LPV DA	952-7⁄8		272 (300-7⁄8)	
LNAV/VNAV DA	1279-17⁄8		599 (600-17⁄8)	
LNAV MDA	1240-1 560 (600-1)		1240-15⁄8 560 (600-15⁄8)	
CIRCLING	1240-1 558 (600-1)		1360-2 678 (700-2) 1360-2¼ 678 (700-2¼)	

