

LOC I-DPA

109.5

APP CRS

097°

Rwy Ldg

4750

TDZE

756

Apt Elev

759

ILS or LOC RWY 10


DUPAGE (DPA)

⚠

When local altimeter setting not received, use Chicago/Aurora altimeter setting: increase S-ILS 10 DA to 993 feet; increase all MDA 40 feet and visibility S-LOC 10 Cats C/D and HOVUB INT minimums S-LOC 10 Cats C/D ½ SM, and Circling and HOVUB INT minimums Circling Cats C/D ¼ SM. Circling Rwy 15, 28, 33 NA at night.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2600 direct JOT VOR/DME and hold.

ATIS 132.075	CHICAGO APP CON 133.5 349.0	DUPAGE TOWER 120.9 257.8	GND CON 121.8	CLNC DEL 119.75
-----------------	--------------------------------	-----------------------------	------------------	--------------------

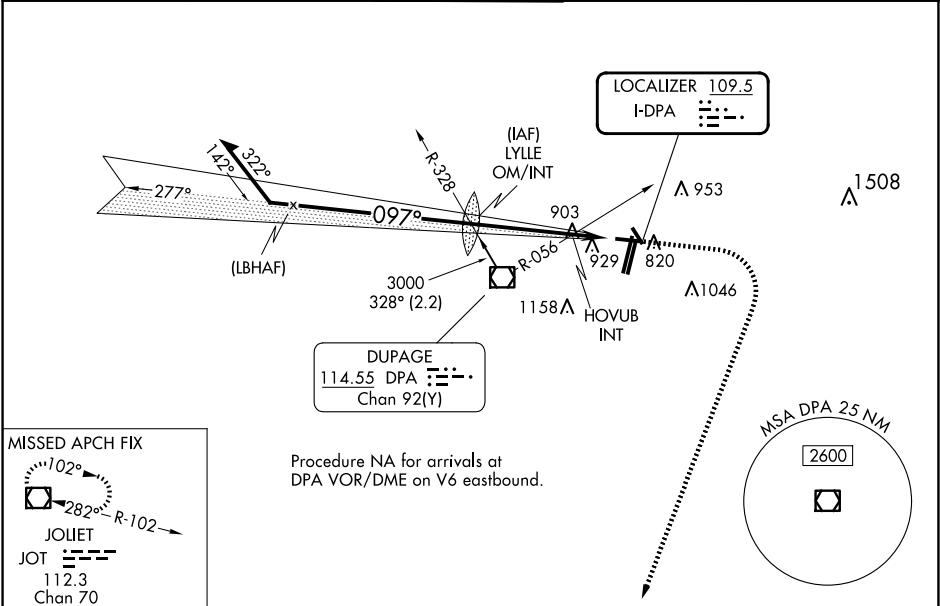

Remain within 10 NM				1200 ↑		2600 ↗		JOT □		ELEV 759		TDZE 756	
3000 277° 097°				2501 LYLLE OM/INT		* LOC only. * 1340 when using Chicago/Aurora altimeter setting.							
GS 3.00° TCH 50				2600		*1300 HOVUB INT							
				3.6 NM		1.7 NM							
CATEGORY	A	B	C	D									
S-ILS 10	956-¾			200 (200-¾)									
S-LOC 10	1300-1		544 (600-1)		1300-1½		544 (600-1½)						
CIRCLING	1300-1 541 (600-1)		1360-1 601 (700-1)		1460-2 701 (800-2)		1460-2¼ 701 (800-2¼)						
HOVUB INT MINIMUMS (DUAL VOR RECEIVERS REQUIRED)													
S-LOC 10	1220-1		464 (500-1)		1220-1¾		464 (500-1¾)						
CIRCLING	1260-1 501 (600-1)		1360-1 601 (700-1)		1460-2 701 (800-2)		1460-2¼ 701 (800-2¼)						