

LOC I-JOU <u>111.1</u>	APP CRS 210°	Rwy Idg 8999 TDZE 1430 Apt Elev 1430
----------------------------------	------------------------	---

ILS or LOC RWY 21
JOE FOSS FLD (FSD)




 ASR
 -31°C

For inoperative MALSR increase S-ILS all Cats visibility to $\frac{3}{4}$ mile, increase S-LOC 21 Cat C/D visibility to $1\frac{1}{8}$ mile. When using WADRI FIX minimums, increase S-LOC 21 Cat C/D visibility to 1 mile.



MISSED APPROACH: Climb to 3400 then right turn direct FSD VORTAC and hold.

ATIS 126.6	SIoux FALLS APP CON ★ 125.8 284.725	SIoux FALLS TOWER ★ 118.3 (CTAF) 0 257.8	GND CON 121.9 348.6	UNICOM 122.95
---------------	--	---	------------------------	------------------

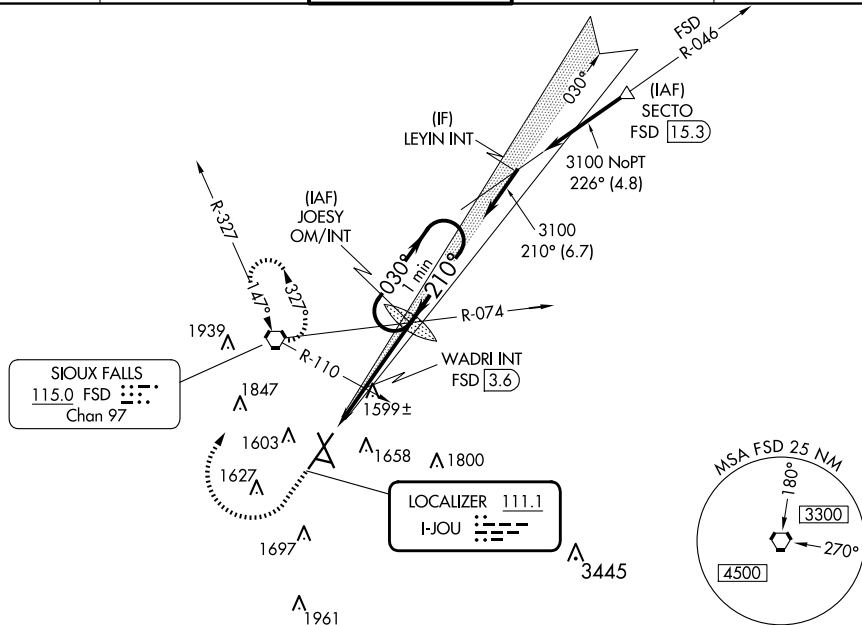

NC-1, 12 JUN 2025 to 10 JUL 2025

ELEV 1430 **D** TDZE 1430

210°

21°

9000 X 150

8000 X 150

3151 X 75

1519


TDZ/CL Rwy 21

REIL Rwy 15 and 33

HIRL Rwy 3-21 and 15-33

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

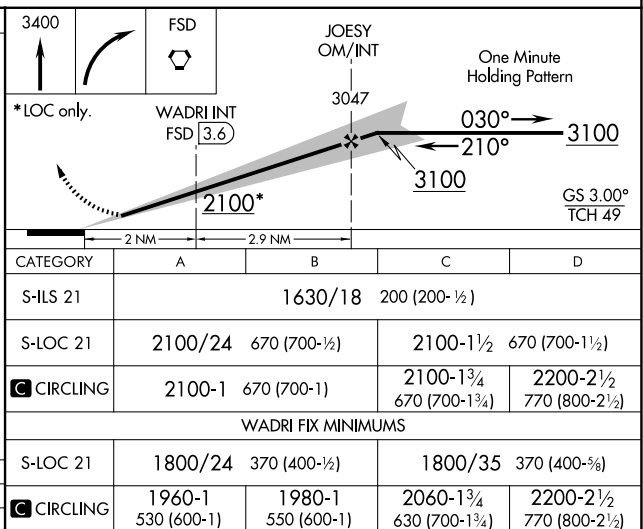

SI|OUX FALLS, SOUTH DAKOTA

Amdt 10C 18JUN20

43°35'N-96°45'W

JOE FOSS FLD (FSD)

ILS or LOC RWY 21