


WAAS CH 86607 W35A	APP CRS 353°	Rwy Idg 5500 TDZE 1946 Apt Elev 1953
--	------------------------	---

RNAV (GPS) RWY 35
PRATT RGNL (PTT)

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F), DME/DME RNP-0.3 NA. When local altimeter setting not received, use Great Bend altimeter setting: Increase LPV DA to 2295 feet and all visibilities $\frac{1}{4}$ SM; Increase LNAV/VNAV DA to 2421 feet and all visibilities $\frac{1}{2}$ SM; Increase all MDAs 100 feet and visibility Cat C $\frac{1}{4}$ SM. Baro-VNAV and VDP NA when using Great Bend altimeter setting.

MISSED APPROACH: Climb to 4300
direct ORLE and hold.

AWOS-3PT 118.725	KANSAS CITY CENTER 118.8 322.425	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

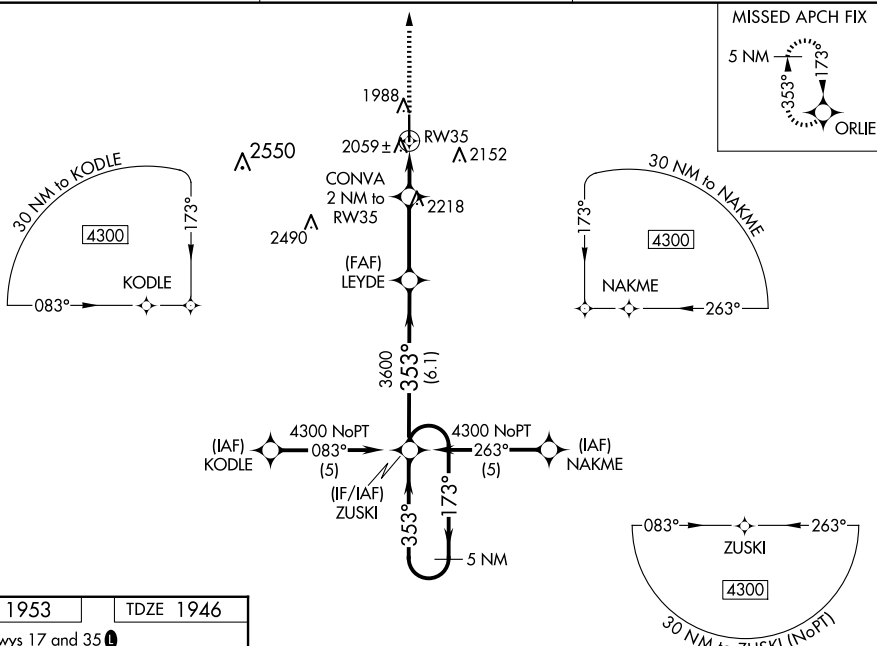


ELEV 1953

TDZE 1946

REIL Rwys 17 and 35

MIRL Rwy 17-35

353°

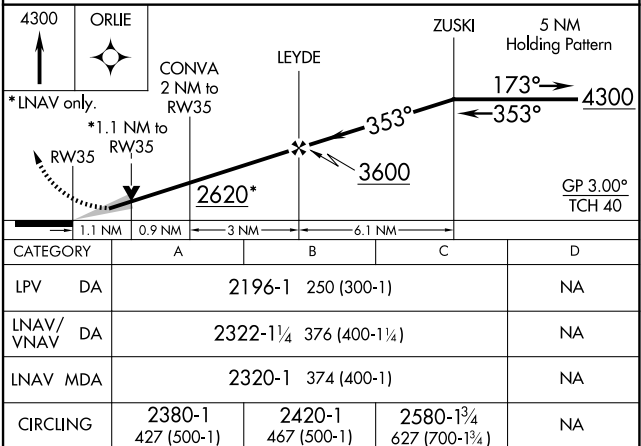

NC-2, 12 JUN 2025 to 10 JUL 2025