

LOC/DME I-BBG 111.35 Chan 50 (Y)	APP CRS 323°	Rwy Idg 7140 TDZE 1302 Apt Elev 1302
--	------------------------	---

ILS or LOC RWY 32
BRANSON (BBG)


NA

Inop table does not apply. When local altimeter setting not received, use Harrison altimeter setting and increase S-ILS 32 DA to 1549 feet; increase all MDAs 60 feet and S-LOC 32 visibility Cat C/D and Circling visibility Cat C ¼ SM. VDP NA when using Harrison altimeter setting.

MALSF

MISSED APPROACH: Climb to 4000 on heading 315° and HRO VOR/DME R-339 to WUTIB INT/HRO 25.3 DME and hold.

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER ★ 128.15 (CTAF) 0	GND CON 118.4	CLNC DEL 118.4	SPRINGFIELD CLNC DEL 126.35 (When tower closed)	UNICOM 122.95
------------------------	--------------------------------------	--	-------------------------	--------------------------	--	-------------------------

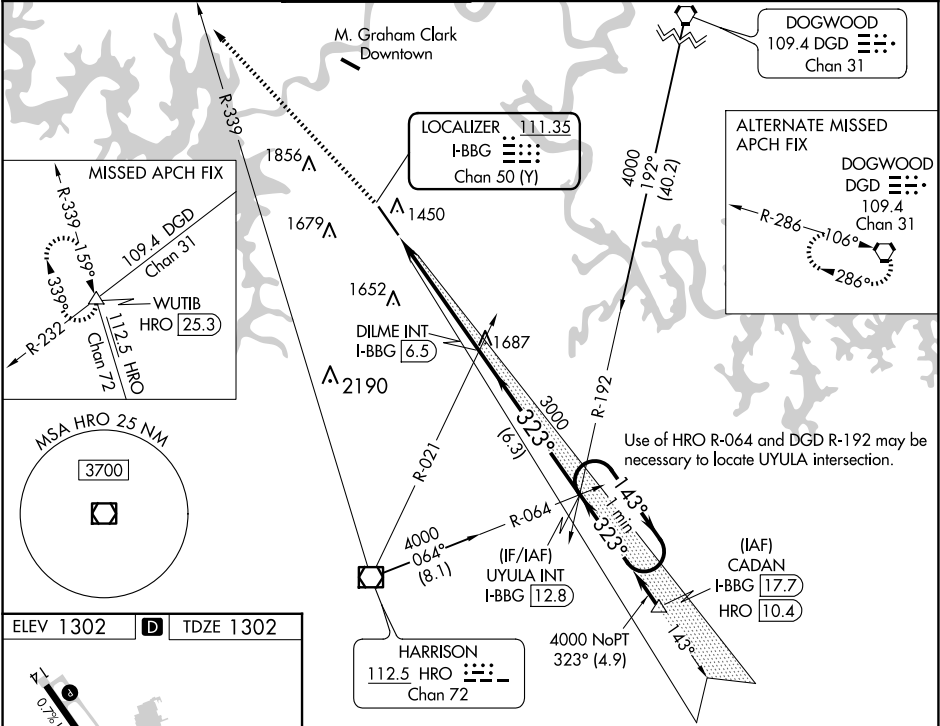

ELEV 1302 **D** TDZE 1302

TWR ★

REIL Rwy 14 **0**
HIRL Rwy 14-32 **0**

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

4000 hdg 315°		HRO R-339	WUTIB	UYULA INT I-BBG 12.8		One Minute Holding Pattern	
*LOC only.		*I-BBG 2.7		3000		143° → 4000	
I-BBG 1.4				3000		← 323°	
1.3 NM		3.8 NM		6.3 NM		GS 3.00° TCH 50	
CATEGORY	A		B		C		D
S-ILS 32	1502-1		200 (200-1)				
S-LOC 32	1760-1		458 (500-1)				
CIRCLING	1760-1		1900-1		2220-2¾		2220-3
	458 (500-1)		598 (600-1)		918 (1000-2¾)		918 (1000-3)

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025