

VOR/DME MCW	APP CRS	Rwy Ldg	6401
114.9	356°	TDZE	1193
Chan 96		Apt Elev	1213

VOR RWY 36
MASON CITY MUNI (MCW)


V VDP NA when using Charles City altimeter setting. When local altimeter setting not received, use Charles City altimeter setting and increase all MDA 100 feet and increase S-36 Cat C/D and Circling Cat C visibility ¼ mile.

A

MALSR

MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct MCW VOR/DME and hold.

ASOS 120.3	MINNEAPOLIS CENTER 127.3 257.675	UNICOM 123.0 (CTAF) 0
---------------	-------------------------------------	---------------------------------

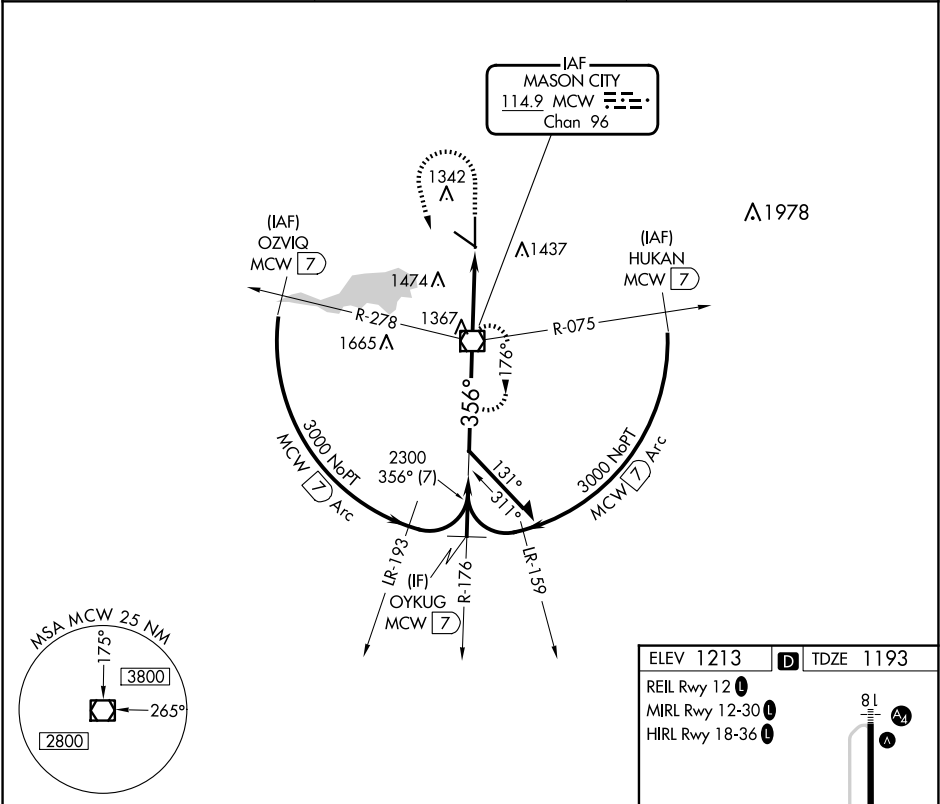

Remain within 10 NM

MCW VOR/DME

2800

176°

356°

2300

2.93° TCH 62

2.1 NM

1.3 NM

MCW 2.1

MCW 3.4

2500

3000

MCW

CATEGORY	A	B	C	D
S-36	1640-¾ 447 (500-¾)	447 (500-¾)	1640-⅞ 447 (500-⅞)	447 (500-⅞)
CIRCLING	1680-1 467 (500-1)	1760-1 547 (600-1)	1780-1½ 567 (600-1½)	1780-2 567 (600-2)

ELEV 1213 **D** TDZE 1193

REIL Rwy 12 **0**

MIRL Rwy 12-30 **L**

HIRL Rwy 18-36 **0**

81

6501 X 1.50

0.3% UP

30

5502 X 1.50

0.3% UP

36

356°

FAF to MAP 3.4 NM

Knots	60	90	120	150	180
Min:Sec	3:24	2:16	1:42	1:22	1:08

NC-3, 12 JUN 2025 to 10 JUL 2025

NC-3, 12 JUN 2025 to 10 JUL 2025