
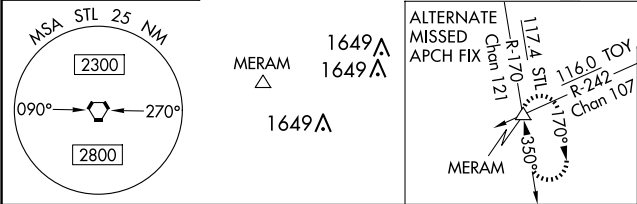


LOC/DME I-STL	APP CRS	Rwy Idg TDZE	7603
110.3	244°	534	
Chan 40		Apt Elev	618


ILS or LOC RWY 24

ST LOUIS LAMBERT INTL (STL)


RADAR required for procedure entry.				MAL S 	MISSED APPROACH: Climb to 3000 then right turn direct FTZ VORTAC and hold.	
▼ Inop table does not apply to S-ILS 24. For inop ALS, increase S-LOC 24 Cat E visibility to 1½ SM.						
D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 120.05 284.6	GND CON 121.9 348.6 (Inbound) 121.65 377.175 (Outbound) 118.925 227.125 (Rwy 11/29)		CLNC DEL 119.5 363.1	CPDLC

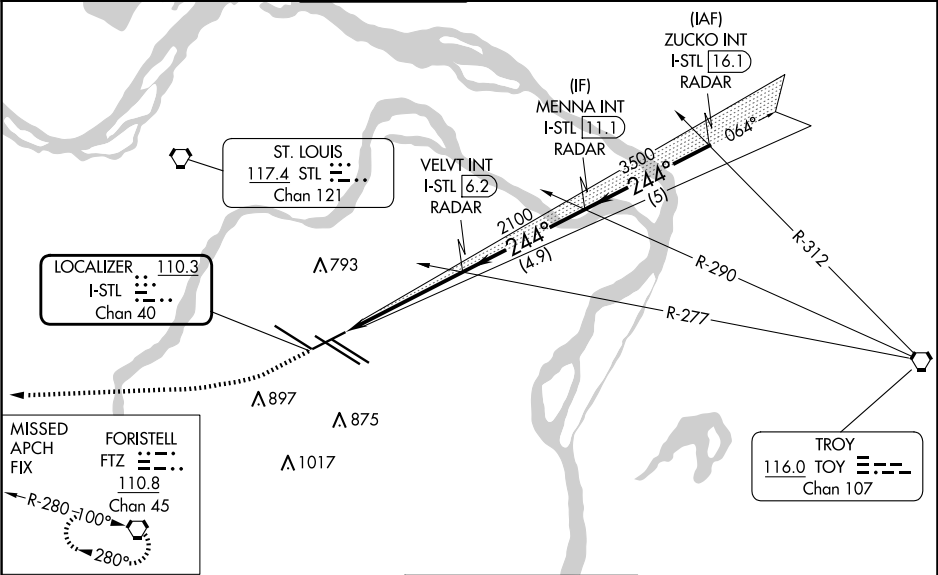

ELEV 618	D	TDZE 534
----------	----------	----------

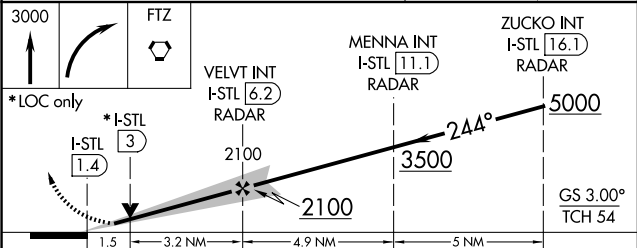

Rwy 6-24 7603 X 150
Rwy 11-29 9000 X 150
Rwy 12L-30R 9013 X 150
Rwy 12R-30L 11020 X 150



CATEGORY	A	B	C	D	E
S-ILS 24	734/40 200 (200-¾)				
S-LOC 24	1080/40	546 (500-¾)	1080-1¾	546 (500-1¾)	

HIRL all Rwys					
TDZ/CL Rwys 11, 12L, 12R, 29, and 30R					
FAF to MAP 4.8 NM					
Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36