

APP CRS 123°	Rwy Idg TDZE Apt Elev	9000 617 617
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 11
ST LOUIS LAMBERT INTL (STL)

RNP AR APCH - GPS, min RNP 0.30. Authorization required from HRBEE or RRIPP: RF.


RADAR required for procedure entry.

▼ Simultaneous approach authorized with Rwys 12L/R, except for arrivals at RRIPP and HRBEE. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -16°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 4500.


ALSF-2

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct IMPER and hold.

D-ATIS 125.025 379.925	ST. LOUIS APP CON 132.125 360.6	ST. LOUIS TOWER 132.475 239.275	GND CON 121.9 348.6 (Inbound) 121.65 377.125 (Outbound) 118.925 227.125 (Rwy 11/29)	CLNC DEL 119.5 363.1	CPDLC
------------------------------	------------------------------------	------------------------------------	--	-------------------------	-------

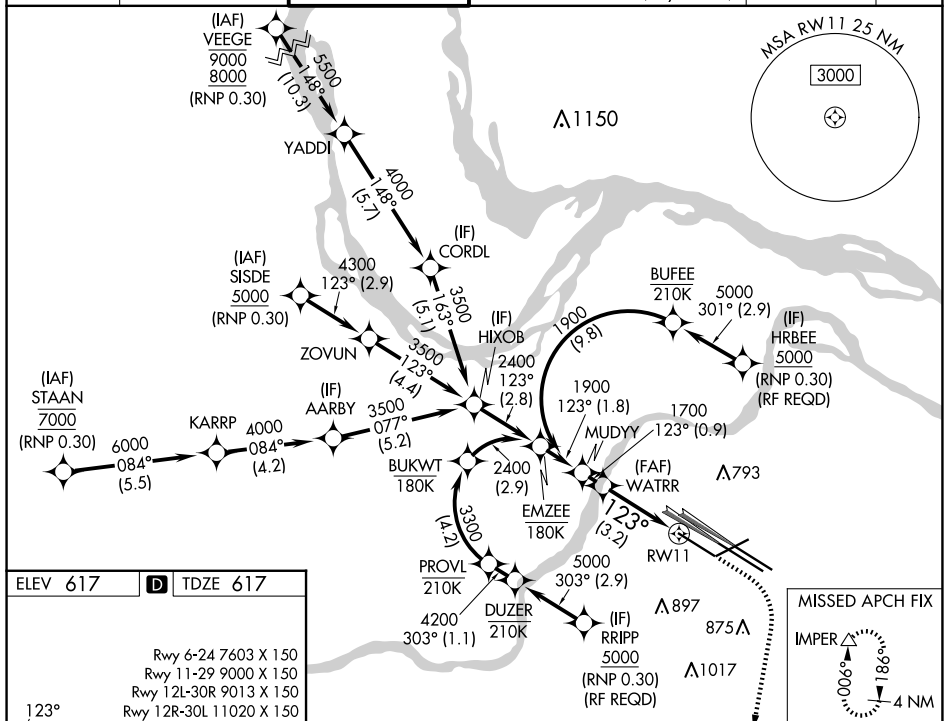

HIRL all Rwwys
TDZ/CL Rwwys 11, 12L, 12R, 29, and 30R

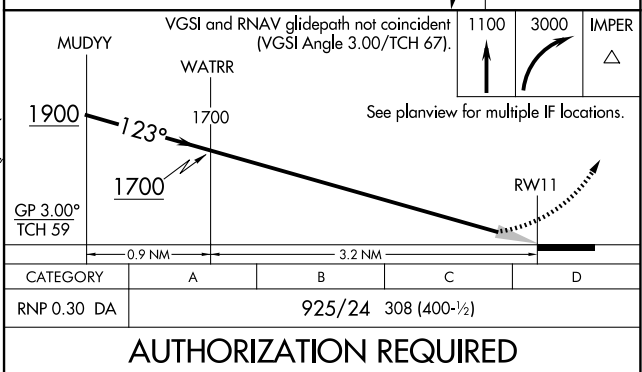

AUTHORIZATION REQUIRED