

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>81912</b><br><b>W06A</b> | APP CRS<br><b>061°</b> | Rwy Idg <b>5765</b><br>TDZE <b>38</b><br>Apt Elev <b>47</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|


RNAV (GPS) RWY 6  
NANTUCKET MEML (ACK)

For uncompensated Baro-VNAV systems. LNAV/VNAV NA below -12°C (11°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase LPV DA to 301, LNAV/VNAV DA to 363 and all MDA 80 ft; increase LNAV Cts C/D visibility to RVR 5000 and Circling Cts C/D visibility ¼ SM. Inoperative table does not apply to LPV. For inoperative ALS increase LNAV/VNAV all Cts visibility to RVR 4500, and LNAV C/D visibility to RVR 5500. For inoperative ALS when using Hyannis altimeter setting, increase LPV all Cts visibility to RVR 4500, increase LNAV/VNAV all Cts visibility to RVR 6000 and increase LNAV Cts C/D to 1/8 SM.


MALSF




|               |                               |                                     |                  |                     |                  |
|---------------|-------------------------------|-------------------------------------|------------------|---------------------|------------------|
| ATIS<br>127.5 | BOSTON APP CON<br>126.1 318.1 | NANTUCKET TOWER ★<br>118.3 (CTAF) 0 | GND CON<br>132.5 | CLNC DEL<br>119.375 | UNICOM<br>122.95 |
|---------------|-------------------------------|-------------------------------------|------------------|---------------------|------------------|

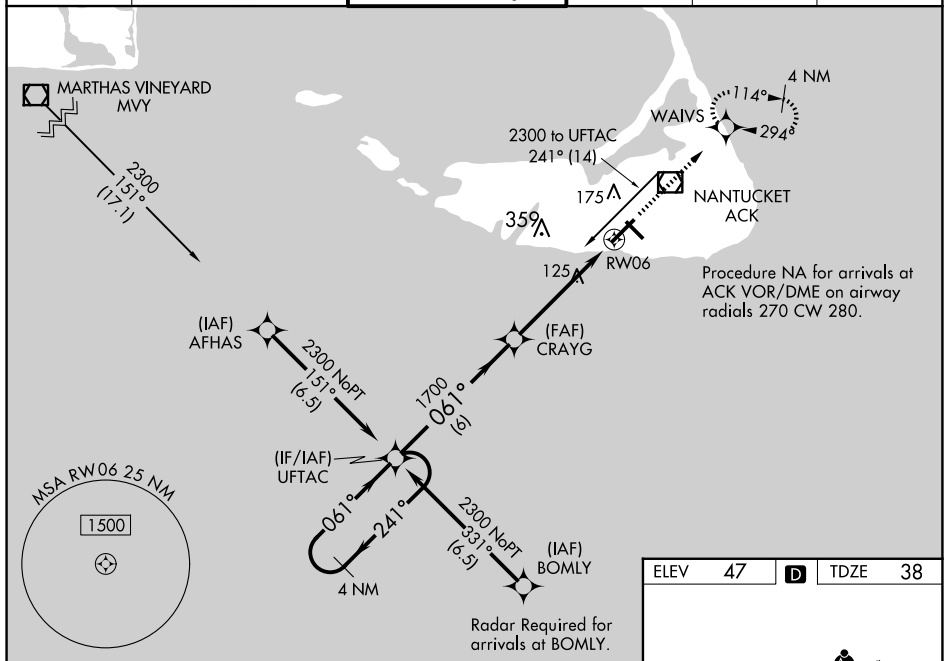

|      |    |          |      |    |
|------|----|----------|------|----|
| ELEV | 47 | <b>D</b> | TDZE | 38 |
|------|----|----------|------|----|

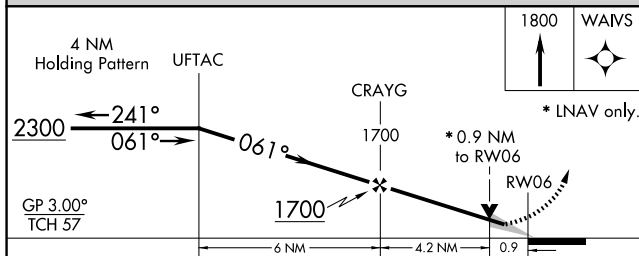

| CATEGORY                                                                                   |     | A                    | B                    | C                    | D                      |
|--------------------------------------------------------------------------------------------|-----|----------------------|----------------------|----------------------|------------------------|
| LPV                                                                                        | DA  | 238/40               |                      | 200 (200-¾)          |                        |
| LNAP/<br>VNAV                                                                              | DA  | 300/40               |                      | 262 (300-¾)          |                        |
| LNAP                                                                                       | MDA | 380/40               |                      | 342 (400-¾)          |                        |
|  CIRCLING |     | 480-1<br>433 (500-1) | 500-1<br>453 (500-1) | 720-2<br>673 (700-2) | 720-2¼<br>673 (700-2¼) |

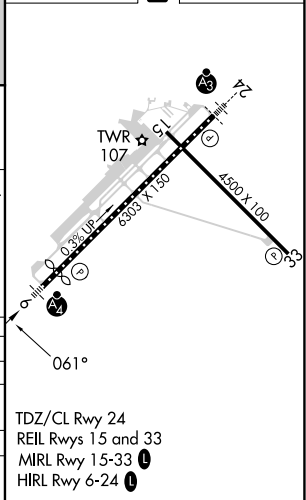

NANTUCKET, MASSACHUSETTS

Amdt 1 15SEP16

41°15'N-70°04'W

NANTUCKET MEML (ACK)  
RNAV (GPS) RWY 6

NE-1, 12 JUN 2025 to 10 JUL 2025