


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>45621</b><br><b>W23A</b> | APP CRS<br><b>229°</b> | Rwy Idg<br>TDZE <b>184</b><br>Apt Elev <b>187</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) Z RWY 23

MORRISTOWN MUNI (MMU)

|                                                                                                                                                                                                                         |                                      |                                                   |                         |                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|---------------------------------------------------|-------------------------|--------------------------------------------------------------------------------------------------|
| RNP APCH.                                                                                                                                                                                                               |                                      |                                                   | MALSR                   | MISSED APPROACH:<br>Climb to 2000 direct SUCSO<br>then on track 250° to SBJ<br>VOR/DME and hold. |
| ⚠ Circling to Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cats C/D visibility to 1¾ SM. |                                      |                                                   | AS                      |                                                                                                  |
| ATIS<br><b>124.25</b>                                                                                                                                                                                                   | NEWARK APP CON<br><b>127.6 379.9</b> | MORRISTOWN TOWER ★<br><b>118.1 0 (CTAF) 353.9</b> | GND CON<br><b>134.2</b> | CLNC DEL<br><b>128.6</b>                                                                         |

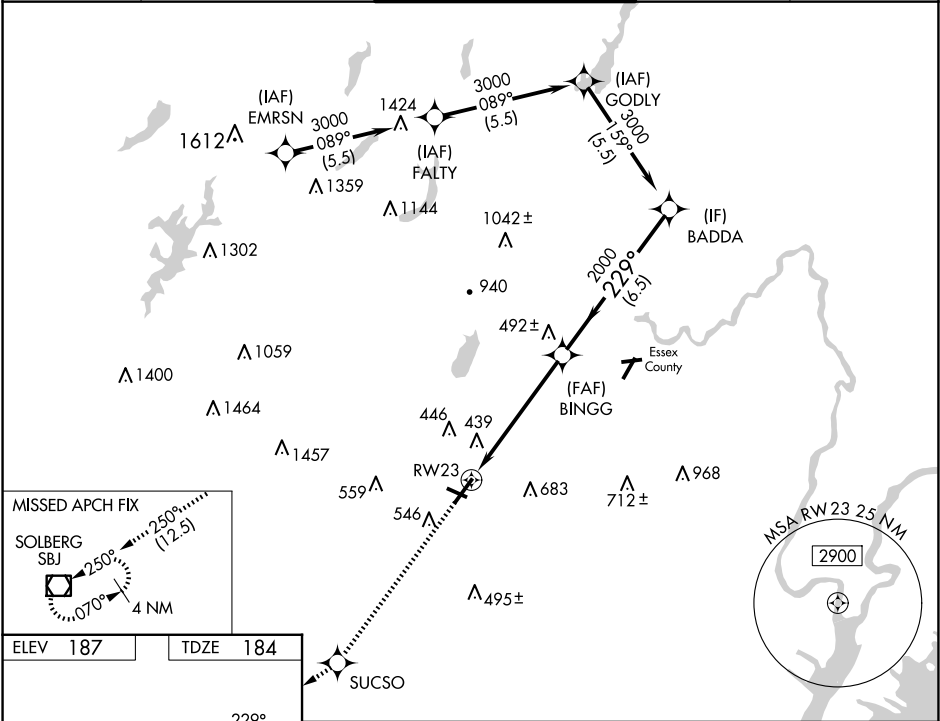

|              |                   |                                                                                                                                                              |                      |                      |  |
|--------------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|--|
| ELEV 187     | TDZE 184          | <div><div>229°</div><div>3000</div><div>SUCSO</div><div>tr 250°</div><div>SBJ</div><div>BADDA</div><div>3000</div><div>GP 3.00°</div><div>TCH 55</div></div> |                      |                      |  |
| * LNAV only  |                   | RW23 1.5 NM to BINGG 2000 229° 2000 1.5 NM 4 NM 6.5 NM                                                                                                       |                      |                      |  |
| CATEGORY     | A                 | B                                                                                                                                                            | C                    | D                    |  |
| LPV DA       | 384-1½            |                                                                                                                                                              | 200 (200-½)          |                      |  |
| LNAV/VNAV DA | 749-1¼            |                                                                                                                                                              | 565 (600-1¼)         |                      |  |
| LNAV MDA     | 700-½ 516 (600-½) |                                                                                                                                                              | 700-1 516 (600-1)    |                      |  |
| CIRCLING     | 860-1 673 (700-1) | 900-1 713 (800-1)                                                                                                                                            | 1000-2½ 813 (900-2½) | 1200-3 1013 (1100-3) |  |