


APP CRS	Rwy Idg	9013
100°	TDZE	421
	Apt Elev	421


RNAV (RNP) Y RWY 10
SYRACUSE HANCOCK INTL (SYR)

RNP AR APCH.	MALSR	MISSED APPROACH:
For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to 1½. For inop ALS, increase RNP 0.30 all Cats visibility to 1¾.		Climb to 3000 on track 100° to STODA and hold.

ATIS	SYRACUSE APP CON	SYRACUSE TOWER	GND CON	CLNC DEL
124,225	126.125 269.125	120.3 239.0	121.7 348.6	125.05 257.775

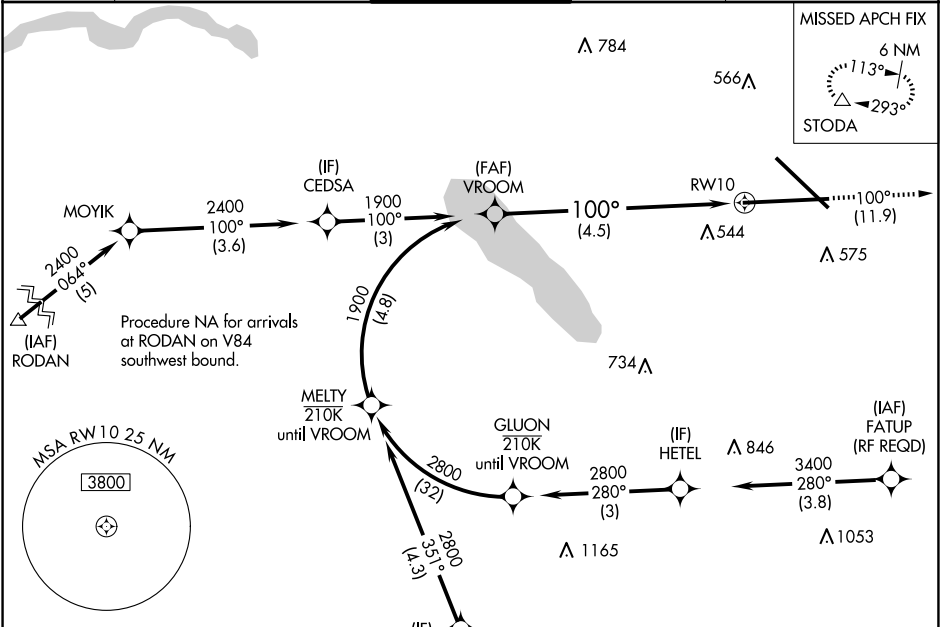

ELEV 421	D	TDZE 421
----------	---	----------



GP 3.00° TCH 55

TDZ/CL Rwy 28

HIRL Rwy 10-28 and 15-33

VROOM 1900				See planview for multiple IF locations.	3000	STODA
1900				100°	trk 100°	△
RW10				4.5 NM		
CATEGORY	A	B	C	D		
RNP 0.15 DA		816/45	395 (400-7%)			
RNP 0.30 DA		881/55	460 (500-1)			
AUTHORIZATION REQUIRED						

NE-2, 12 JUN 2025 to 10 JUL 2025

NE-2, 12 JUN 2025 to 10 JUL 2025