


WAAS CH 87115 W05A	APP CRS 053°	Rwy Idg TDZE Apt Elev 6215 947 947
--	------------------------	--

RNAV (GPS) Y RWY 5

WEST VIRGINIA INTL YEAGER (CRW)

RNP APCH.		MISSED APPROACH: Climb to 3000 direct ENIVY and hold.		
For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.				
ATIS 127.6	CHARLESTON APP CON 124.1 269.125	CHARLESTON TOWER 125.7 257.8	GND CON 121.8 348.6	CLNC DEL 118.55

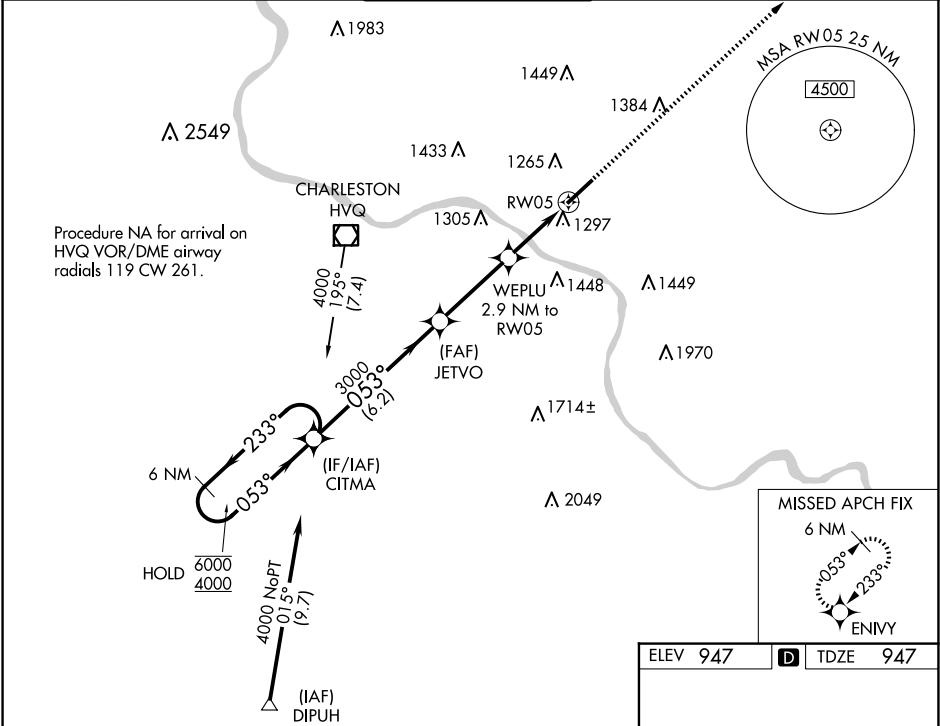

6 NM Holding Pattern CITMA		3000 ENIVY	
6000 ← 233° 4000 → 053°		* INAV only	
GP 3.00° TCH 56		* 1.7 NM to RWY 5	
3000		RWY 5	
6.2 NM		1.2 NM	
JETVO		WEPLU 2.9 NM to RWY 5	
3000		* 1920	
1147/40		200 (200-¾)	
LNNAV/ VNAV		1584-1¾ 637 (700-1¾)	
LNNAV MDA		1560-55 613 (700-1) 1560-1¾ 613 (700-1¾)	
CIRCLING		1760-2½ 813 (900-2½) 1880-3 933 (1000-3)	

