

WAAS CH 42719 W06A	APP CRS 065°	Rwy Ldg 3523 TDZE 301 Apt Elev 302
--	------------------------	---

RNAV (GPS) RWY 6
WINGS FLD (LOM)


RNP APCH

T Baro-VNAV NA when using Pottstown altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Pottstown altimeter setting and increase all DA 35 feet and all MDA 40 feet; increase LPV Cats A/B visibility ¼ mile. Rwy 6 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000
direct HOMEWE and hold.

AWOS-3 118.925	PHILADELPHIA APP CON 126.85 263.125	CLNC DEL 118.55	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------	---------------------------------

Procedure NA for arrival
at PTW VORTAC on
V403-405 northeast bound.

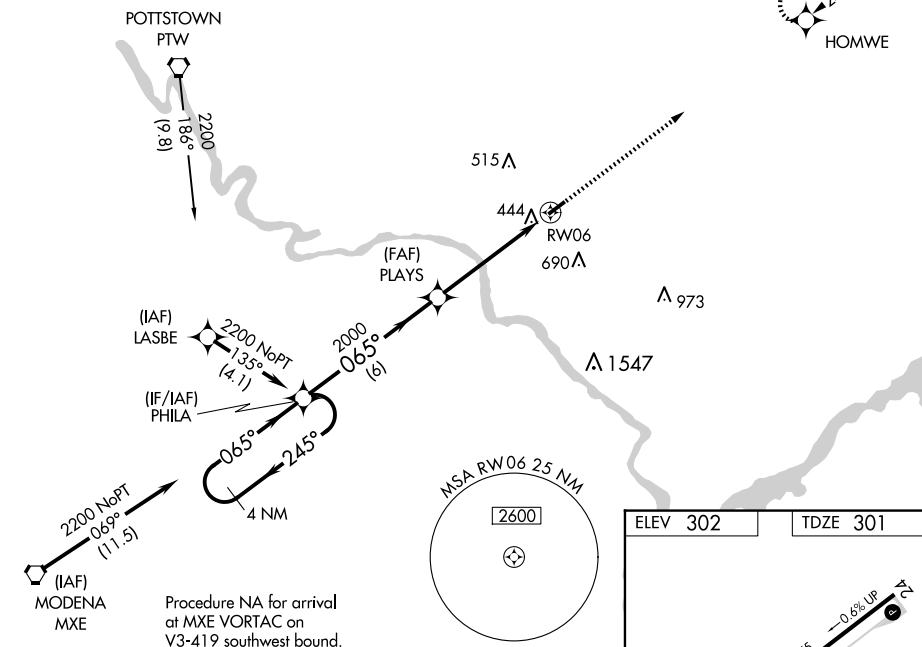

CATEGORY		A	B	C	D
LPV	DA	614-1	313 (400-1)		NA
INAV/ VNAV	DA	788-1 $\frac{3}{4}$	487 (500-1 $\frac{3}{4}$)		NA
INAV	MDA	720-1	419 (500-1)		NA
CIRCLING		780-1	478 (500-1)		NA

REIL Rwy 6 and 24 **L**
MIRL Rwy 6-24 **L**