

WAAS CH 78117 W26A	APP CRS 268°	Rwy Idg 5001 TDZE 36 Apt Elev 36
--	------------------------	---

RNAV (GPS) RWY 26

PHILADELPHIA INTL (PHL)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.
For inop ALS, increase LPV all Cats visibility $\frac{1}{2}$ SM, increase LNAV Cats A and B
to RVR 5500. Simultaneous approach authorized. LNAV procedure NA during simultaneous
operations. Use of FD or AP providing RNAV track guidance required during simultaneous
operations. Rwy 26 helicopter visibility reduction below RVR 4000 NA.


MAISR




MISSED APPROACH:
Climb to 800 then
climbing right turn
to 3000 direct
FROSE and hold.

D-ATIS	PHILADELPHIA APP CON	PHILADELPHIA TOWER		GND CON	CLNC DEL
ARR 133.4		118.5	327.05 (Rwys 9L/27R, 8/26 and 17/35)		
DEP 135.925	124.35 319.15	135.1	327.05 (Rwy 9R/27L)	121.9 348.6	118.85 348.6


CPDLC

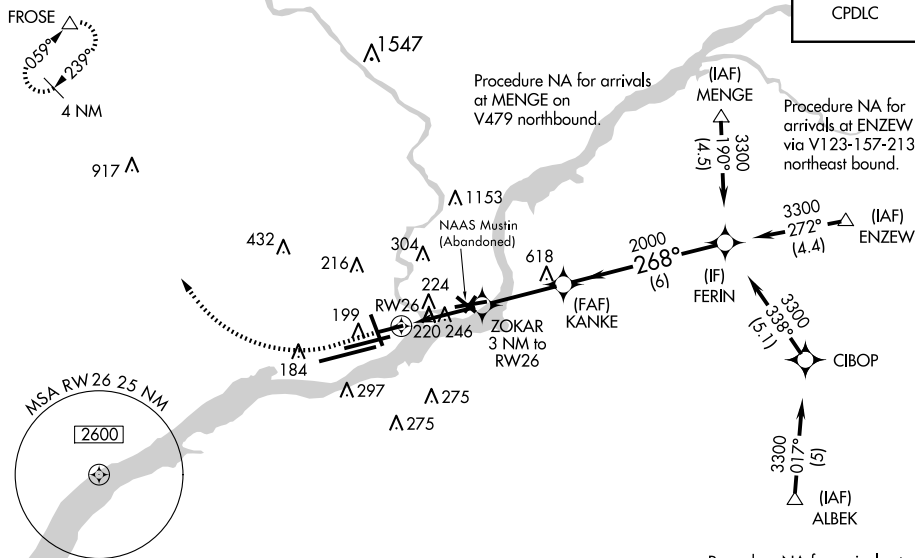

ELEV 36	D	TDZE 36
---------	----------	---------



TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35

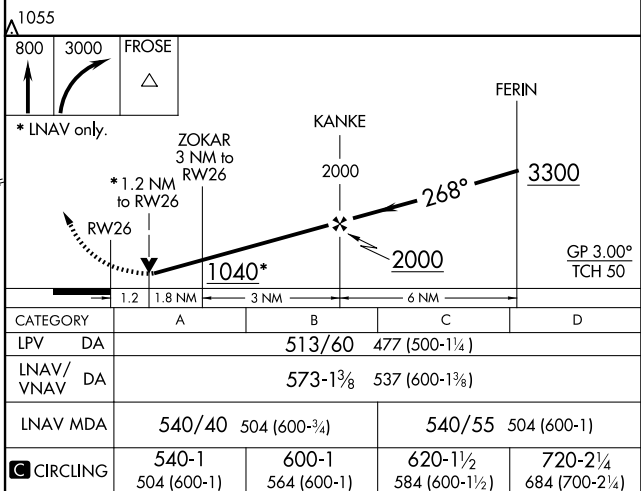

RNAV (GPS) RWY 26