

WAAS CH 70307 W27A	APP CRS 265°	Rwy Idg 7985 TDZE 6121 Apt Elev 6160
--	------------------------	---

RNAV (GPS) RWY 27

CHEYENNE RGNL/JERRY OLSON FLD (CYS)

RNP APCH.




For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -24°C or above 45°C. For inop ALS, increase LNAV/VNAV all Cnts visibility to RVR 4000.
RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH: Climb to 6600, then climbing right turn to 10400 direct SENSE and hold, continue climb-in-hold to 10400.

ATIS 134.425 278.3	CHEYENNE APP CON★ 124.55 263.075	CHEYENNE TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 254.275	UNICOM 122.95
-----------------------	-------------------------------------	--	--------------------------	------------------

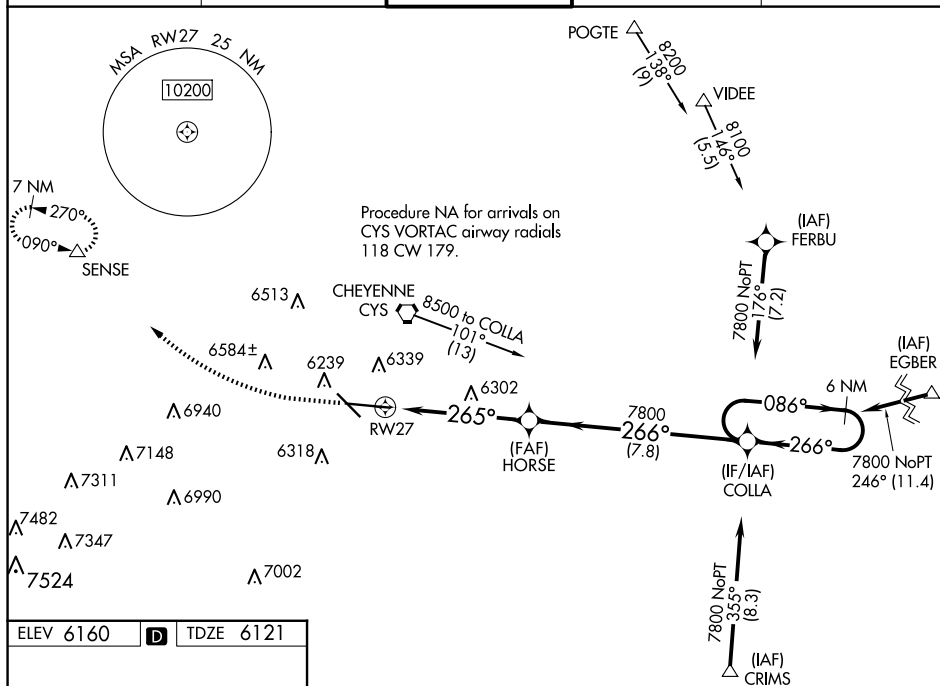

ELEV 6160	D	TDZE 6121
-----------	----------	-----------

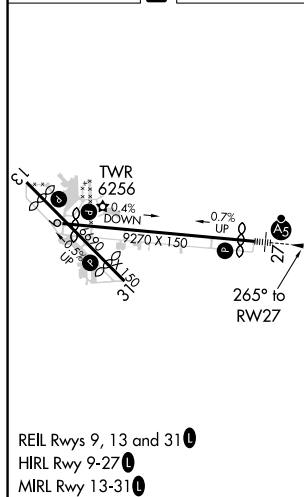[illegible]

RNAV (GPS) RWY 27