

LOC/DME I-MFR <u>110.3</u> Chan 40	APP CRS 143°	Rwy Idg 8800 TDZE 1303 Apt Elev 1335
--	------------------------	---

ILS or LOC RWY 14
ROGUE VALLEY INTL/MEDFORD (MFR)

DME required. DME or RADAR required for procedure entry.


T Circling NA for Cats C and D northeast of Rwy 14-32.
A When Medford alimeter setting not received, procedure
 NA. For inop ALS, increase S-LS 14 visibility to 1½ SM,
 increase S-LOC 14# Cats C and D visibility to RVR 5500,
 increase S-LOC 14 Cats C and D visibility to 2½ SM.
***** -3°C

MALSR




MISSED APPROACH: Climb to 6600 on I-MFR SE course to JLOK/I-MFR 1.6 DME and climbing right turn on heading 350° and on OED VORTAC R-160 to OED VORTAC and hold, continue climb-in-hold to 6600.
#Missed approach requires minimum climb of 331 feet per NM to 4100.

ATIS 127.25	CASCADE APP CON★ 124.3 379.9	MEDFORD TOWER★ 119.4 (CTAF) 0257.8	GND CON 121.8	UNICOM 122.95
----------------	---------------------------------	---------------------------------------	------------------	------------------

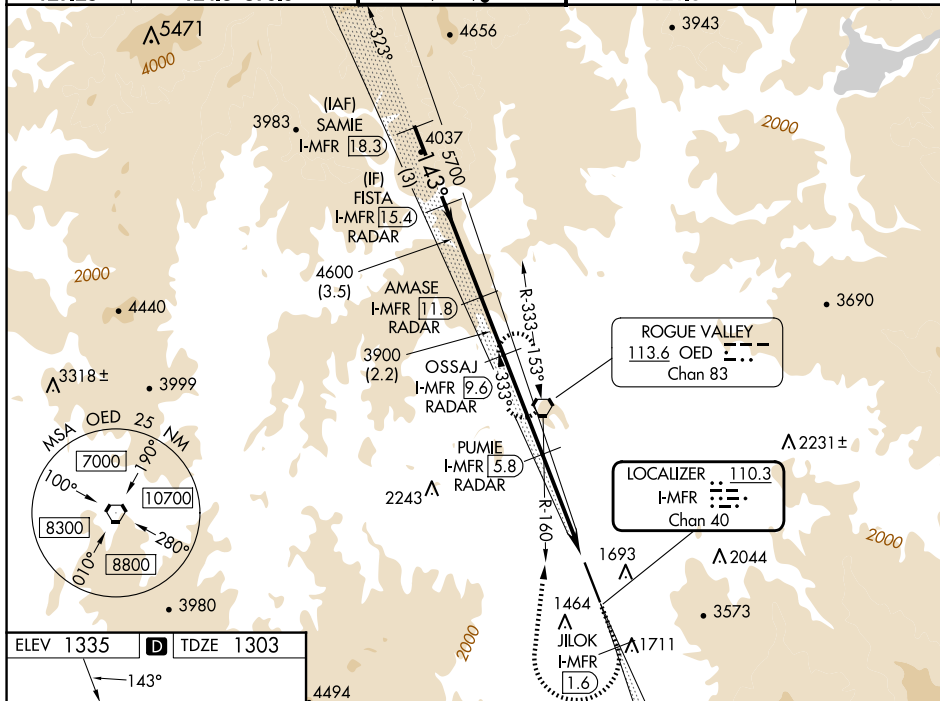


ELEV 1335	D	TDZE 1303
-----------	----------	-----------

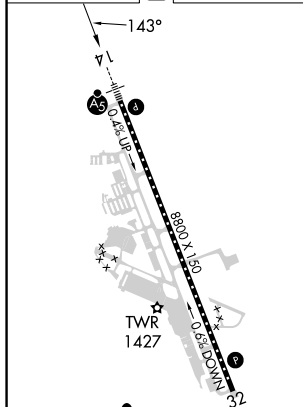

CL Rwy 14-32 **L**
TDZ/CL Rwy 14 **L**
REIL Rwy 32 **L**
HIRL Rwy 14-32 **L**

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 73).

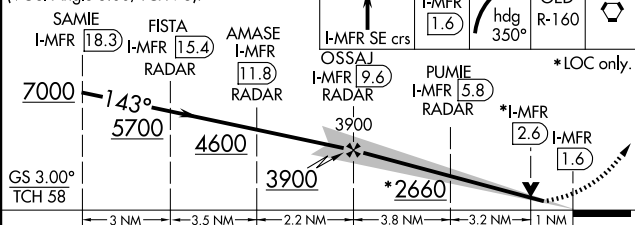

CATEGORY	A	B	C	D
S-ILS 14#	1503/18		200 (200-½)	
S-ILS 14	1929-1 ³ / ₈		626 (600-1 ³ / ₈)	
S-LOC 14#	1680/24	377 (400-½)	1680/35	377 (400-½)
S-LOC 14	2080/24 777 (800-½)	2080/40 777 (800-¾)	2080-1 ³ / ₄	777 (800-1 ³ / ₄)
 CIRCLING	2080-1 745 (800-1)	2080-1 ¹ / ₄ 745 (800-1 ¹ / ₄)	2080-2 ¹ / ₂ 745 (800-2 ¹ / ₂)	2340-3 1005 (1100-3)