

WAAS CH 77640 W35A	APP CRS 351°	Rwy Idg TDZE Apt Elev	8599 1089 1110
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35

LAWTON-FORT SILL RGNL (LAW)

RNP APCH.

▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cts visibility to ¾ SM.


MALSR

A5

MISSED APPROACH:

(Do not exceed 200K until WEGTE) Climb to 1520 then climbing left turn to 2700 direct WEGTE and hold.

ATIS 120.75	FORT SILL APP CON 120.55 322.4	LAWTON TOWER ★ 119.9 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

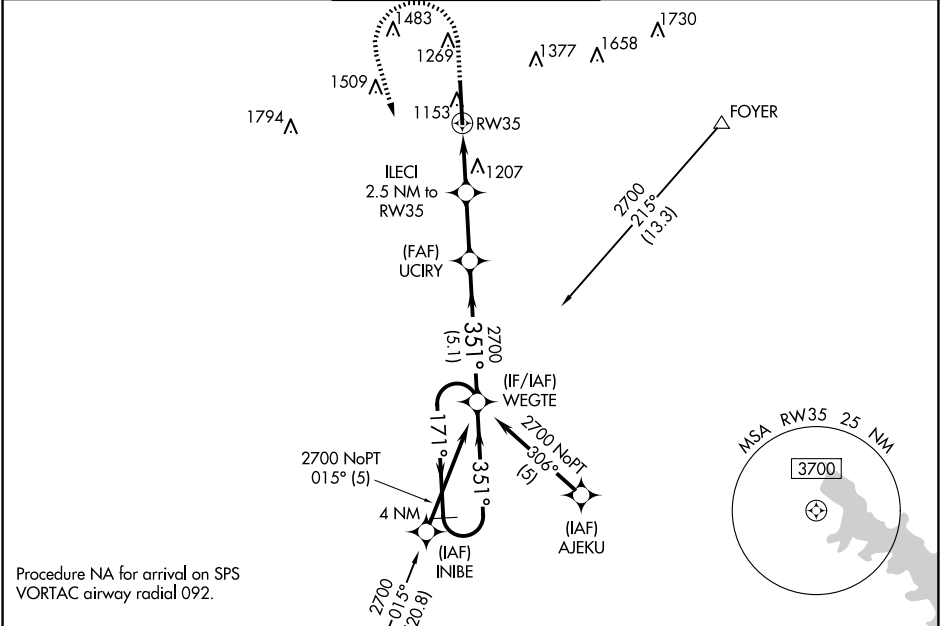

1520 2700 WEGTE

*LNAV only.

ILECI

2.5 NM to RW35

*1.2 NM to RW35

1780

UCIRY

2700

WEGTE

4 NM Holding Pattern

171° → 2700

← 351°

GP 3.00° TCH 55

CATEGORY	A	B	C	D
LPV DA		1289-½	200 (200-½)	
LNAV/VNAV DA		1376-½	287 (300-½)	
LNAV MDA	1520-½	431 (500-½)	1520-¾	431 (500-¾)
CIRCLING	1620-1	510 (600-1)	1820-2 710 (800-2)	1820-2¼ 710 (800-2¼)

