

WAAS CH 42811 W22A	APP CRS 227°	Rwy Ldg 7200 TDZE 260 Apt Elev 266
--	------------------------	---

RNAV (GPS) RWY 22L

BILL AND HILLARY CLINTON NTL/ADAMS FLD (LIT)


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C.
▼ Rwy 22L helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV or LNAV Cat C and D. For inop ALS, increase LNAV Cat A and B visibility to RVR 5000. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.

MALSF

MISSED APPROACH:
Climb to 2900 direct MYNIE and on track 224° to BAUDE and hold.

D-ATIS 125.65	LITTLE ROCK APP CON 135.4 353.6	ADAMS TOWER 118.7 257.8	GND CON 121.9 339.8	CLNC DEL 118.95
-------------------------	---	-----------------------------------	-------------------------------	---------------------------

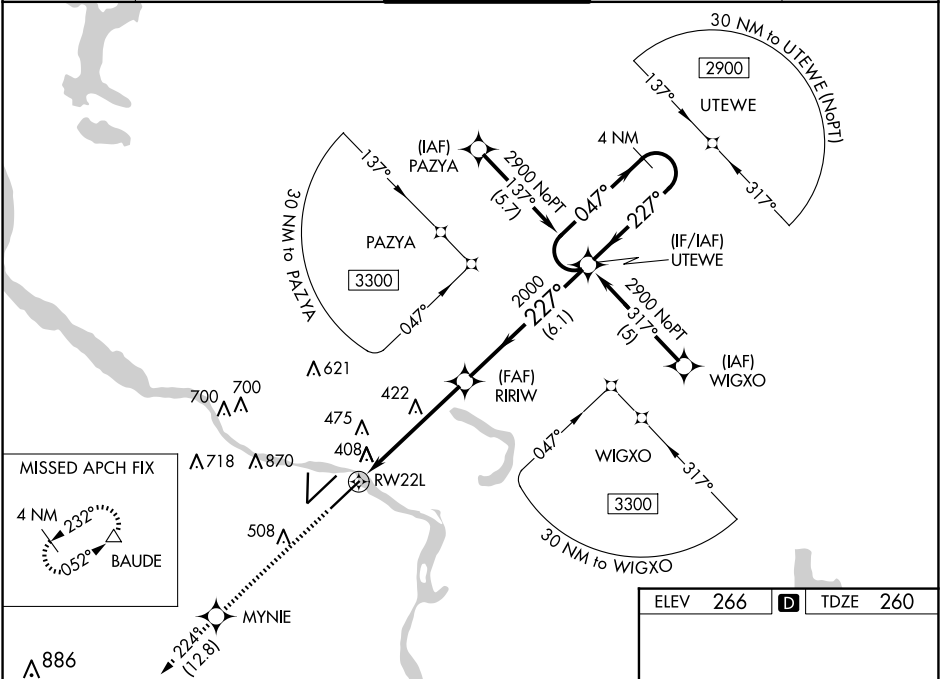

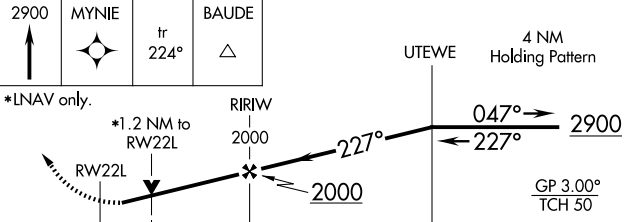2900 ↑	MYNIE 	tr 224°	BAUDE 				
*LNAV only.							
					GP 3.00° TCH 50		
CATEGORY		A		B		C	D
LPV	DA	543/50		283 (300-1)			
LNAV/ VNAV	DA	774-1¾		514 (600-1¾)			
LNAV	MDA	680/40 420 (500-¾)		680/60 420 (500-1¼)			
 CIRCLING	820-1 554 (600-1)	1000-1 734 (800-1)		1180-2¾ 914 (1000-2¾)		1180-3 914 (1000-3)	

