


WAAS CH 69401 W17A	APP CRS 175°	Rwy Ldg TDZE 541 Apt Elev 548
--	------------------------	---


RNAV (GPS) RWY 17
COX FLD (PRX)

RNP APCH - GPS. Baro-VNAV and VDP NA when using SLR altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 868 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1016 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM. MISSED APPROACH: Climb to 2200 direct CUKBO and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875	UNICOM 122.975 (CTAF) 0
----------------------------	-------------------------------------	-----------------------------------

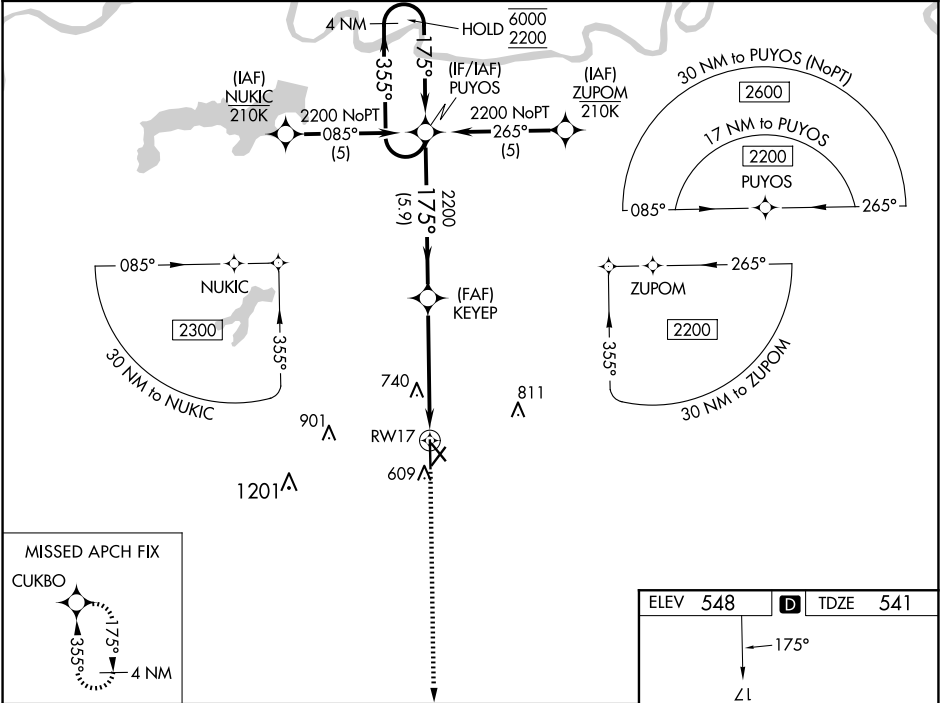

4 NM Holding Pattern PUYOS				
6000 2200 355° 175° 2200 1.4 NM to RW17				
GP 3.00° TCH 40 5.9 NM 3.6 NM 1.4 NM				
CATEGORY	A	B	C	D
LPV DA	791-3/4 250 (300-3/4)			
LNAV/VNAV DA	939-1 398 (400-1 1/2)			
LNAV MDA	1040-1	499 (500-1)	1040-1 3/8	499 (500-1 3/8)
CIRCLING	1060-1	512 (600-1)	1100-1 1/2 552 (600-1 1/2)	1220-2 1/4 672 (700-2 1/4)

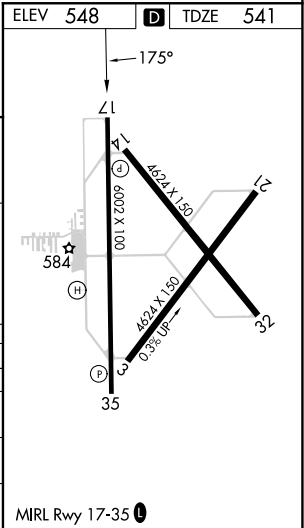

SC-2, 12 JUN 2025 to 10 JUL 2025

SC-2, 12 JUN 2025 to 10 JUL 2025