

LOC/DME I-OYC	APP CRS	Rwy Idg	6080
109.5	355°	TDZE	40
Chan 32		Apt Elev	46

ILS or LOC RWY 36

CORPUS CHRISTI INTL (CRP)



DME required.

For inop ALS, increase S-ILS 36 Cat E visibility to RVR 4000 and S-LOC 36 Cat C/D/E visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 700 then climbing left turn to 2000 on heading 338° and CRP VORTAC R-287 to ATHIS INT/CRP 23.3 DME and hold.

ATIS	CORPUS APP CON	CORPUS TOWER	GND CON	CLNC DEL
126.8	120.9 348.725	119.4 257.8	121.9 269.15	118.55

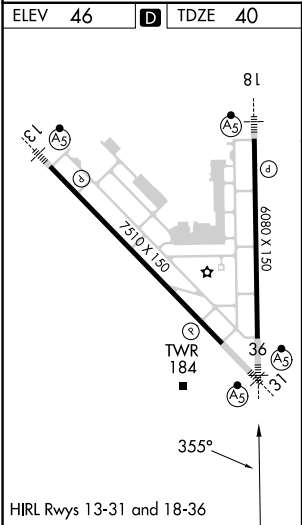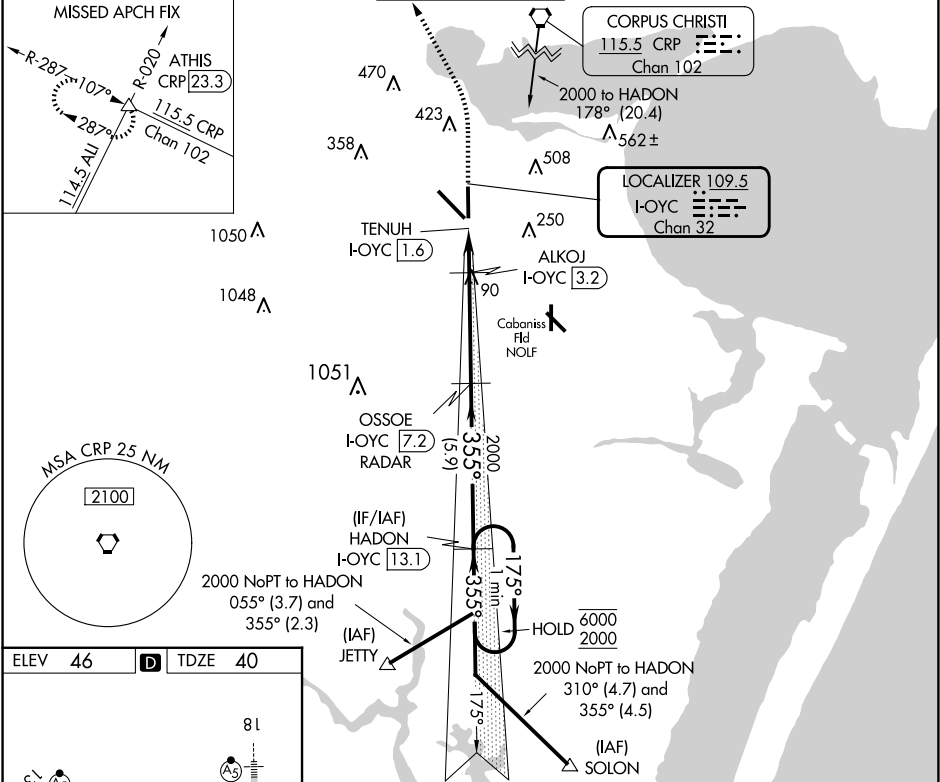

700	2000	ATHIS	ILS unusable inside DA. LOC unusable within 1.6 DME.		
hdg 338°	CRP R-287	△	OSSOE I-OYC 7.2	HADON I-OYC 13.1	One Minute Holding Pattern
			RADAR		
			ALKOJ I-OYC 3.2	2000	175° → 6000
			TENUH I-OYC 1.6	720	← 355° 2000
				2000	GS 3.00° TCH 53
			0.4	1.6 NM	4 NM
CATEGORY	A	B	C	D	E
S-ILS 36	240/24 200 (200-1/2)				
S-LOC 36	340/24 300 (300-1/2)				
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025