


|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>69617</b><br><b>W36A</b> | APP CRS<br><b>355°</b> | Rwy ldg <b>6080</b><br>TDZE <b>40</b><br>Apt Elev <b>46</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) Y RWY 36

CORPUS CHRISTI INTL (CRP)

|                                                                                                                                                                                                                                                                                       |  |       |                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-------|----------------------------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                                                                       |  | MALSR | MISSED APPROACH: Climb to 2000 direct FEKEL and on track 304° to ATHIS and hold. |
| ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat E visibility to RVR 6000.<br>▲ * RVR 1800 authorized with use of FD or AP or HUD to DA. |  | AS    |                                                                                  |

|                      |                                        |                                    |                                |                           |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|
| ATIS<br><b>126.8</b> | CORPUS APP CON<br><b>120.9 348.725</b> | CORPUS TOWER<br><b>119.4 257.8</b> | GND CON<br><b>121.9 269.15</b> | CLNC DEL<br><b>118.55</b> |
|----------------------|----------------------------------------|------------------------------------|--------------------------------|---------------------------|

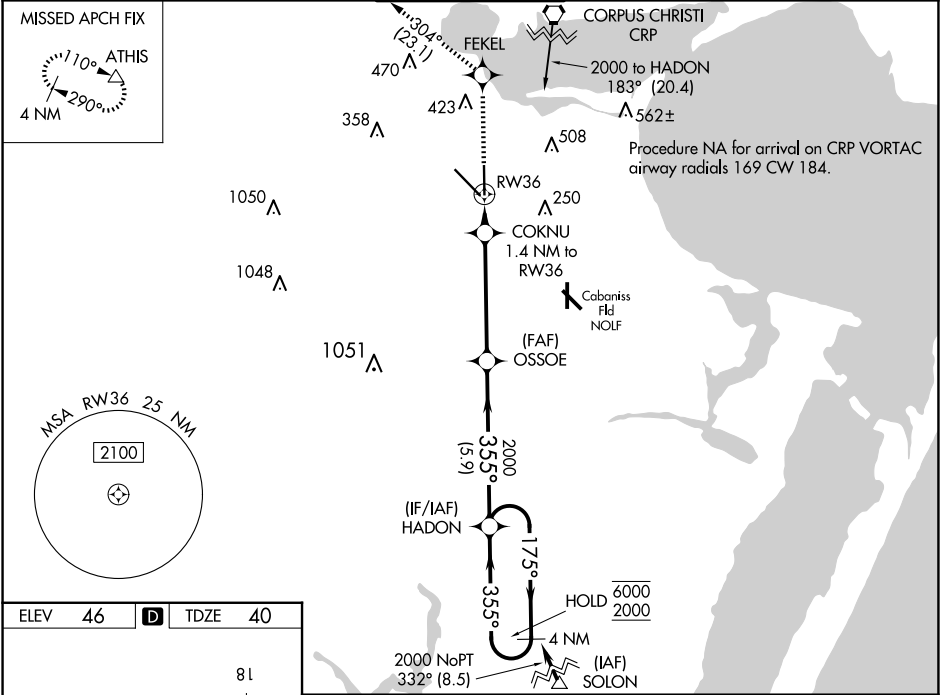

|              |                      |                      |                        |                        |                        |
|--------------|----------------------|----------------------|------------------------|------------------------|------------------------|
| 2000         | FEKEL                | ATHIS                | OSOUE                  | HADON                  | 4 NM Holding Pattern   |
| ↑            | ✧                    | △                    | ✧                      | ✧                      |                        |
|              | tr 304°              |                      |                        |                        |                        |
|              |                      |                      | 2000                   | 355°                   | 175°                   |
|              |                      |                      | 520                    | 2000                   | 6000                   |
|              |                      |                      |                        |                        | GP 3.00° TCH 53        |
|              |                      |                      | 1.4 NM                 | 4.6 NM                 | 5.9 NM                 |
| CATEGORY     | A                    | B                    | C                      | D                      | E                      |
| LPV DA*      | 240/24               |                      | 200 (200-½)            |                        |                        |
| LNAV/VNAV DA | 356/24               |                      | 316 (400-½)            |                        |                        |
| LNAV MDA     | 440/24               |                      | 400 (400-½)            |                        | 440/35 400 (400-¾)     |
| CIRCLING     | 500-1<br>454 (500-1) | 780-1<br>734 (600-1) | 820-2¼<br>774 (800-2¼) | 820-2½<br>774 (800-2½) | 820-2¾<br>774 (800-2¾) |

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025