WAAS CH 61329 W16A	APP CRS 166°	Rwy Ldg 9501 TDZE 2872 Apt Elev 2872

RNAV (GPS) RWY 16R
MIDLAND INTL AIR AND SPACE PORT (MAF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 25°C (77°F). Rwy 16R helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Circling Rwy 16L NA at night.

MISSED APPROACH: Climb to 4700 direct ICORO and hold.

ATIS	MIDLAND APP CON★	MIDLAND TOWER★	GND CON	CLNC DEL	UNICOM
126.8 235.975	124.6 290.4	118.7 (CTAF) (L) 273.45	121.9 348.6	118.05 317.65	122.95

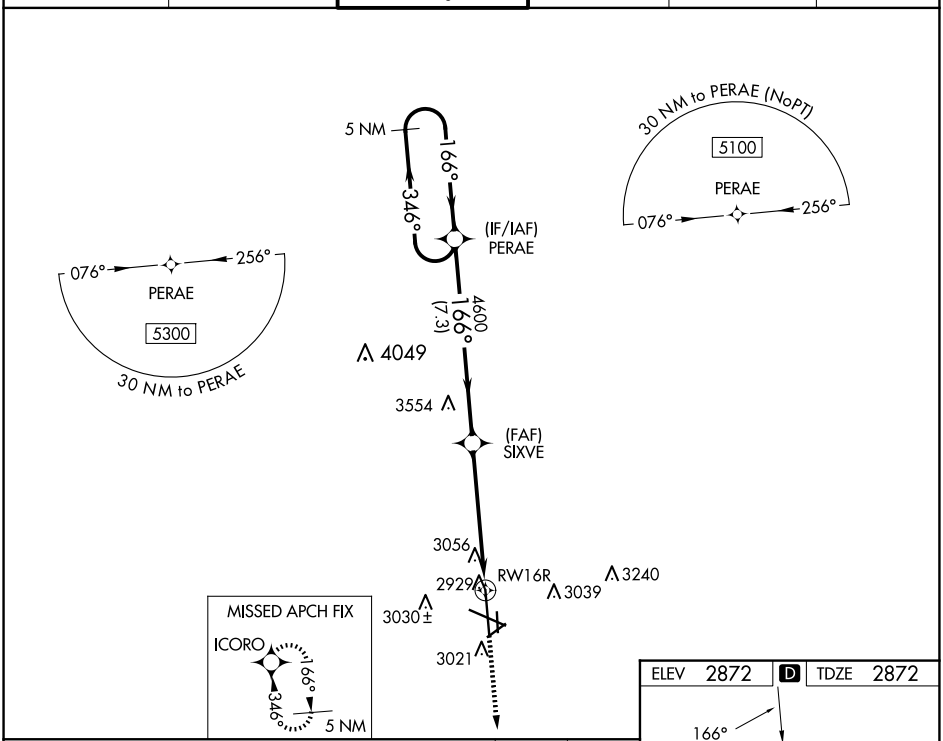

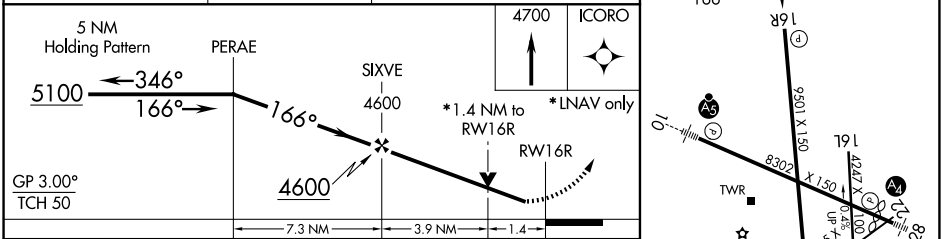

CATEGORY	A	B	C	D
LPV DA	3072-¾ 200 (200-¾)			
LNAV/VNAV DA	3398-1¾ 526 (600-1¾)			
LNAV MDA	3360-1 488 (500-1)		3360-1⅜ 488 (500-1⅜)	
CIRCLING	3440-1 568 (600-1)		3440-1½ 568 (600-1½)	3520-2 648 (700-2)

REIL Rwy 34L
MIRL Rwys 4-22 and 16L-34R (L)
HIRL Rwys 10-28 and 16R-34L

SC-3, 12 JUN 2025 to 10 JUL 2025

SC-3, 12 JUN 2025 to 10 JUL 2025