

APP CRS	Rwy Ldg	6948
197°	TDZE	-1
	Apt Elev	4

RNAV (RNP) Z RWY 20
LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to RVR 6000.

MALS

$\textcircled{A_4}$ —

MISSED APPROACH: Climb to 2000 on track 197° to POLLY and track 109° to SAFES and hold.

D-ATIS
127.55


NEW ORLEANS APP CON		
WEST	125.5	350.35
EAST	133.15	290.3

NEW ORLEANS TOWER
119 5 254.3

GND CON
121.9 273.525

CLNC DEL
120-925

CPDLC

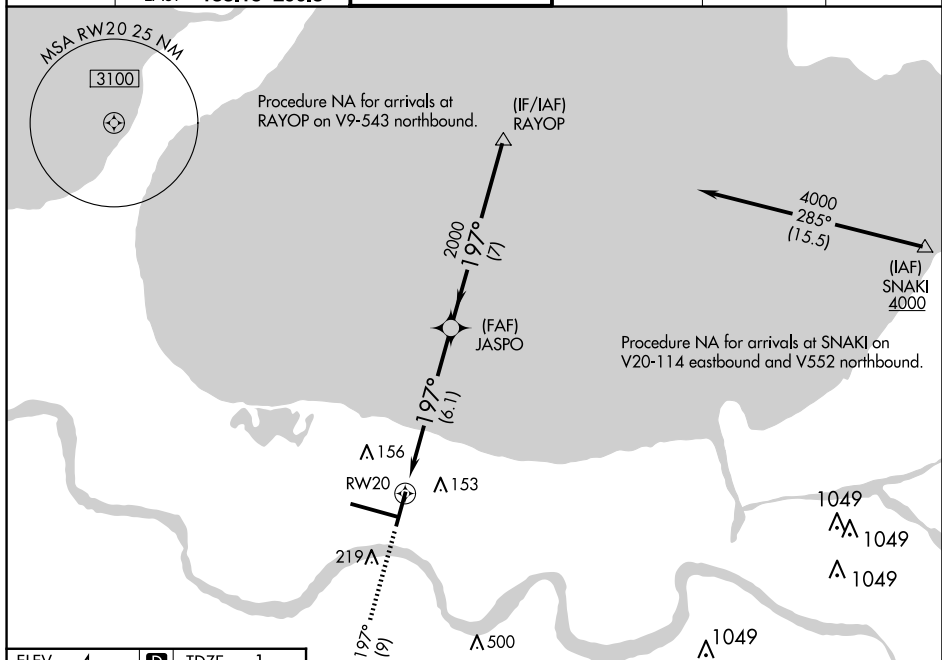

ELEV	4	D	TDZE	-1
------	---	----------	------	----

RLLS Rwy 2
TDZ/CL Rwy 11
HIRL All Runways

MISSED APCH FIX

SAFES 

2000 ↑	tr 197°	POLY ✦	tr 109°	SAFES △
-----------	------------	-----------	------------	------------

CATEGORY	A	B	C	D
RNP 0.11 DA		363/40	364 (400-¾)	
RNP 0.30 DA		414/50	415 (500-1)	

AUTHORIZATION REQUIRED

NEW ORLEANS, LOUISIANA

Amdt 1A 07OCT21

LOUIS ARMSTRONG NEW ORLEANS INTL (MSY)

30°00'N-90°16'W

RNAV (RNP) Z RWY 20