

WAAS CH 65809 W01A	APP CRS 009°	Rwy Idg TDZE 588 Apt Elev 588
--	------------------------	---

RNAV (GPS) RWY 1

LEBANON MUNI (M54)


▼

▲NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4° F) or above 47° C (116° F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Nashville Intl altimeter setting: increase LPV DA to 1131 and all Cats visibility ¼ SM; increase all MDA 60 feet and Circling Cat C visibility ¼ SM. LNAV/VNAV NA when using Nashville Intl altimeter setting.

MISSED APPROACH:
Climb to 3000 direct LATGE and hold.

AWOS-3 118.325	NASHVILLE APP CON 118.4 360.7	CTAF 122.725
--------------------------	---	------------------------

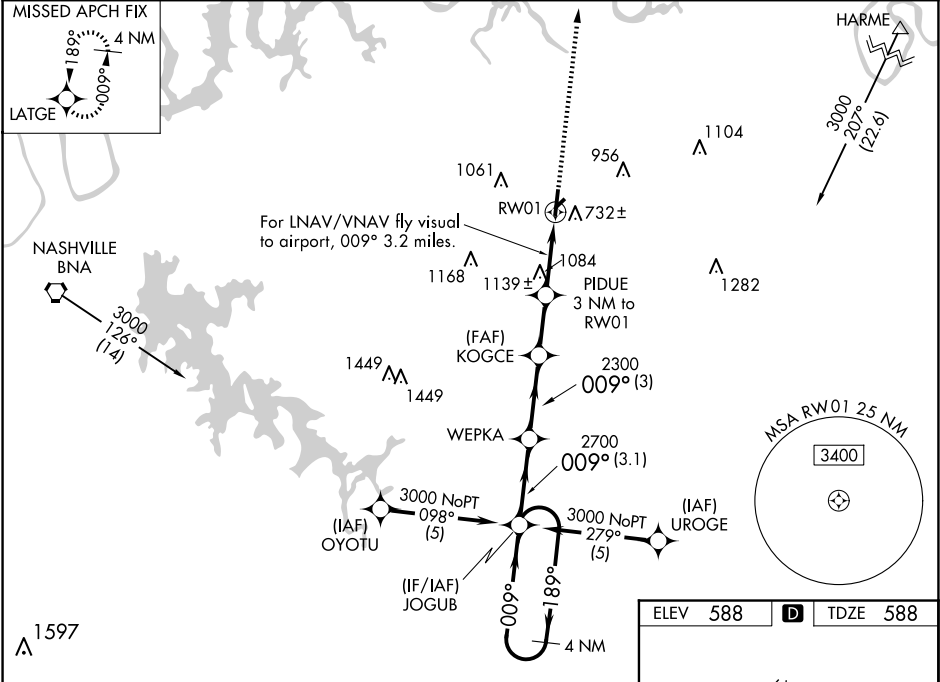

4 NM Holding Pattern JOGUB

For LNAV/VNAV fly visual to airport, 009° 3.2 miles.

3000 LATGE

GP 3.00° TCH 45

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).

WEPKA KOGCE PIDUE 3 NM to RW01 RW01

*1580 *LNAV only.

3.1 NM 3 NM 2.2 NM

CATEGORY	A	B	C	D
LPV DA	1088-1¾ 500 (500-1¾)			
LNAV/VNAV DA	1663-2 1075 (1100-2)	1663-3 1075 (1100-3)		
LNAV MDA	1400-1 812 (900-1)	1400-1¼ 812 (900-1¼)	1400-2½ 812 (900-2½)	1400-2¾ 812 (900-2¾)
CIRCLING	1400-1¼ 812 (900-1¼)	1440-2½ 852 (900-2½)	1520-3 932 (1000-3)	

