
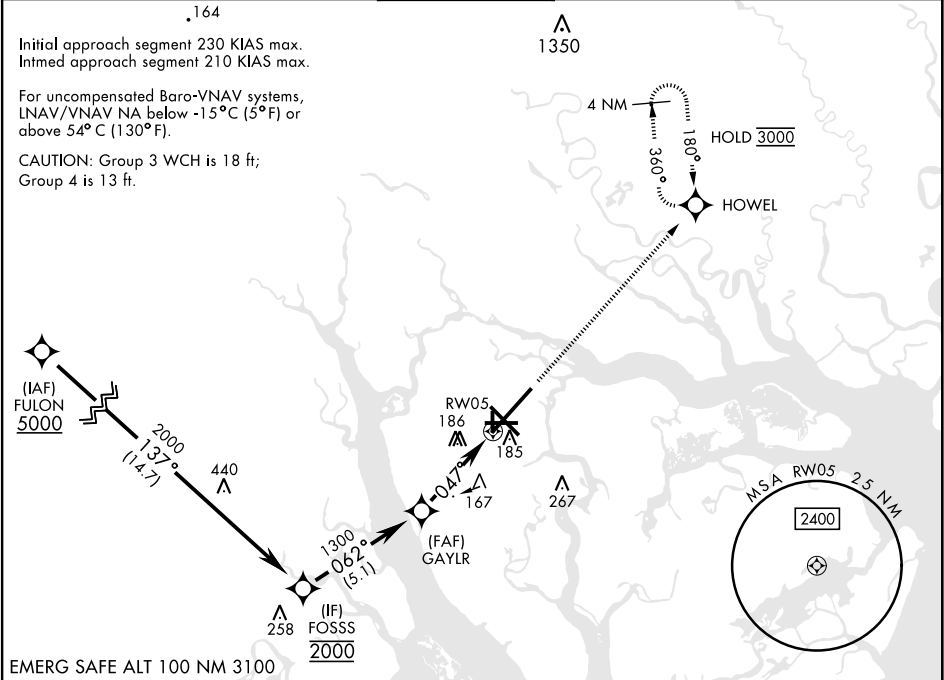


RNAV (GPS) RWY 5

WAAS Chan 90095 W05A		APCH CRS 047°	Rwy ldg 12,202 TDZE 37 Arpt Elev 37	[UN]	BEAUFORT MCAS (MERRITT FLD) (KNBC)		
RNP APCH				SALSF A2	MISSED APPROACH: Climb to 3000 direct HOWEL and hold, continue climb-in-hold to 3000.		
RADAR required							
▼ * When ALS inop, increase vis to 1 mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD to 1½ miles.							
ATIS ★ 279.525	APP CON 125.125 292.125 (ABV 3000) 123.7 269.125 (3000 and BLW)			TOWER★ 119.05 342.875	GND CON 128.15 348.625	CLNC DEL 128.15 254.375	ASR/ PAR

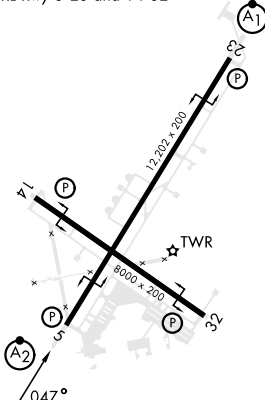

FULON 5000 FOSSS 2000 GAYLR 1300 1.1 NM to RW05 RW05 3.9 NM				3000 ↑ HOWEL 	ELEV 37 TDZE 37	HIRL Rwy 5-23 and 14-32 			
GP 3.00 ° TCH 38									
CATEGORY	A	B	C	D					
LPV DA	237-¾	200	(200-¾)						
LNAV/ * VNAV DA	409-¾	372	(400-¾)						
LNAV MDA	420-¾	383	(400-¾)	420-7/8	383	(400-7/8)			
CIRCLING	560-1	523	(600-1)	580-1½	543	(600-1½)	600-2	563	(600-2)

RNAV (GPS) RWY 5

SE-2, 12 JUN 2025 to 10 JUL 2025

SE-2, 12 JUN 2025 to 10 JUL 2025